

IMPORTANT: The PULSE Barryvox® is designed for snow and mountain sports outside of controlled, groomed slopes within ski area boundaries as well as controlled, maintained trails. All snow and winter sport activities are inherently dangerous.

Knowledge and experience are essential to reduce the risk of injury or even death. Do not enter avalanche terrain without an experienced guide or equivalent training. Apply common sense at all times. Never pursue these activities alone.



Reference Manual

PULSE Barryvox®

Version 4.0 2013



PULSE Barryvox®

MAMMUT



[Photo: Patricia Schreyer]

REGISTRATION AND SERVICE

Register your PULSE Barryvox® today!

By registering your device, you will gain exclusive access to the Barryvox Community. We will remind you when to have your device serviced and provide you with technical tips, the latest insights on avalanche theory, as well as information about the availability of software updates. If you register now, several services will be free of charge!

Register your PULSE Barryvox® at:

www.mammut.ch/barryvox

Service Centers	Information and prices for maintenance and repair are available at: www.mammut.ch/barryvox (-> Service)
Switzerland	Mammut Sports Group AG, Birren 5, CH-5703 Seon Phone: +41 (0)62 769 83 88 email: info@mammut.ch
Europe and countries not listed	Mammut Sports Group GmbH, Mammut-Basecamp 1, DE-87787 Wolfertschwenden Phone: +49 (0) 8334 3620 300 email: eu.customerservice@mammut.ch
USA and Canada	Mammut Sports Group Inc., 458 Hurricane Lane, Suite 111, US-Williston, VT 05495 Phone: +1 800 451 5127 email: info@mammutusa.com


© Copyright by Mammut Sports Group AG

Illustrations and Avalanche Rescue Expertise copyright and provided by Genswein.

All rights reserved. Text, text excerpts, images and diagrams are all subject to copyright. No part may be reproduced or copied without written permission from the publisher. For further use and publications for educational purposes, please contact Mammut Sports Group AG.

Mammut and Barryvox are registered trademarks of the Mammut Sports Group AG. All rights reserved.

FRONT VIEW

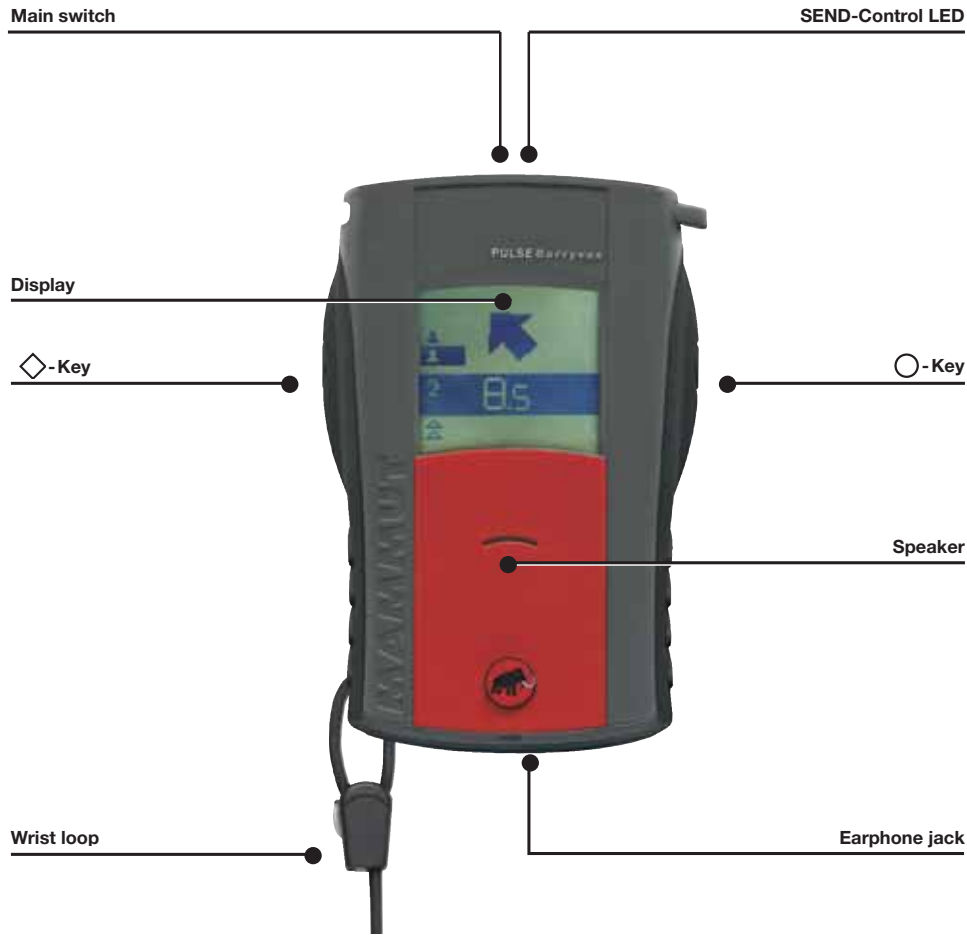

PULSE Barryvox®

AVALANCHE RISK MANAGEMENT

For years, Mammut has been heavily involved in «Avalanche Risk Management» [a.r.m.] with the objective to increase the safety of all winter sports enthusiasts by providing better equipment, know-how transfer, and focused training.



Avalanche Training Centers

Within the "Avalanche Training Centers", provided by Mammut in several regions, you have the opportunity to practice realistic search and excavation situations for free. In addition to comprehensive information on the assessment of avalanche danger, permanently installed, snow-covered transmitters can be activated randomly and searched for.

Mammut and Snowpulse Airbag Systems:
The additional use of a Mammut or Snowpulse Airbag increases the chance to stay on the surface and therefore considerably reduces the risk of a complete burial.



Rescue Equipment

With the PULSE Barryvox, probes, shovels and the airbag systems, Mammut offers a comprehensive choice of avalanche rescue and survival devices.

Additional information on [a.r.m.] or Mammut products can be found at: www.mammut.ch

PULSE Barryvox®



[Photo: Rainer Eder]

WELCOME

Congratulations on the purchase of your new PULSE Barryvox®.

This user manual explains the functionality and use of the PULSE Barryvox®. The PULSE Barryvox® is a revolutionary avalanche transceiver, which you will understand quickly and which is very easy to use.

A transceiver does not protect you against avalanches!

As a winter outdoor enthusiast, you must consider all possible avalanche prevention measures and plan your trips carefully. Companion rescue – the worst case – must be practiced frequently. Under the stress of an accident, this is the only way you will be able to locate and dig out a companion quickly and efficiently. Despite practice and all the technological advancements, by far not all of the completely buried avalanche victims are rescued! An avalanche burial is always life threatening.

Important information on these topics can be found in the chapters on companion rescue and avalanche theory.

PULSE Barryvox® – Made in Switzerland
Our heritage is compelling. Mammut and Barryvox follow the time-honored tradition of world-class precision products made in Switzerland. From its design to its engineering and production, this device is completely Swiss-made.

This device is compatible with all avalanche transceivers that comply with the EN 300718 standard and operate on a frequency of 457 kHz.

The following documents for the Barryvox transceivers are available at www.mammut.ch/BarryvoxManual:

Barryvox Legal and Regulatory Guide

Contains information concerning the normative and legal use of the device, warranty and repair, as well as the region and country specific differences in the application of the W-Link data transmission.

Barryvox Emergency Plan

Stick the emergency plan on the back of the battery compartment lid. It shows the elementary steps for a successful companion rescue.

Barryvox User manual

The user manual, a practical companion in the field, describes the functions of the device in its «basic» profile.

Barryvox Reference Manual

The reference manual is a comprehensive resource of information for your Barryvox. It includes all information on the Advanced Mode for advanced and professional users, the complete system overview, information on maintenance and troubleshooting, but as well on rescue organization, excavation and avalanche prevention.

TABLE OF CONTENTS

Front view

Welcome


1.	Application concept and overview of functions	10
2.	Initial Setup	16
3.	Start Menu and Settings	18
4.	Setup	26
5.	Send Mode (SEND)	32
6.	Search Mode (SEARCH)	34
	Search Phases.....	34
	Standard Mode	40
	Search for Multiple Buried Subjects	44
	Analog Search Tone	46
	Analog Mode.....	49
7.	Advanced Features	54
8.	Additional Information	56
9.	Companion Rescue	62
10.	Introduction to Avalanche Theory	70
	Index	74

OPERATION

1. Application concept and overview of functions

1.1 Main Switch OFF / SEND / SEARCH

The main switch is located on the top side of the device. It can be moved by pressing down on the button. By applying lateral pressure to the switch, it can be set to SEND at any time. In the left switch position, the transceiver is OFF, in the center position, it is in SEND mode, and in the right position, the SEARCH mode is activated. To get into the OFF position, an additional safety button must be pressed down, as well.

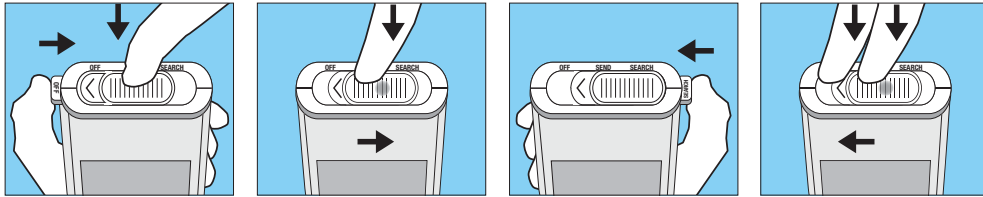

OFF -> SEND

SEND -> SEARCH

SEARCH -> SEND

SEND -> OFF


Always make sure that the switch locks into position mechanically to avoid an undesired change of mode.

1.2 Use of Keys


The PULSE Barryvox® clearly excels through its ease of use. The device is operated using the two lateral keys. The current function of the keys is always shown at the bottom of the display. On the left, the function of the left ◊-key is shown; on the right, you will see the function of the right ○-key. If the text is centered, either key can be pressed to activate the function.

Examples:


One Function

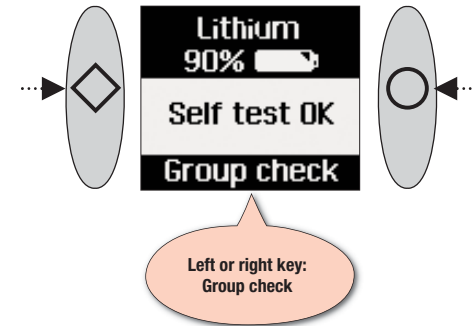

Two Functions

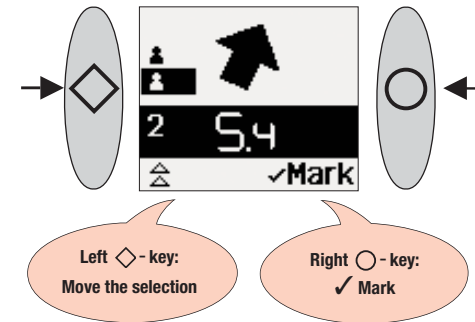


Special Functions

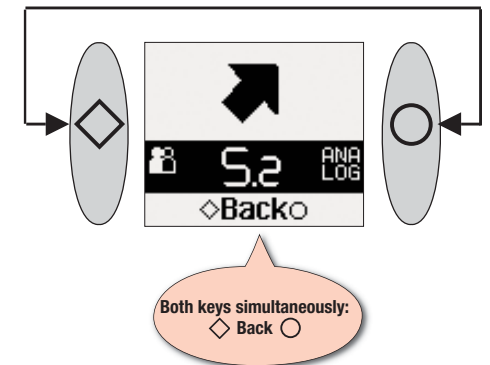


COCKPIT INITIAL SETUP


INITIAL SETUP




OFF -> SEND
Chapter «Main Switch»




Future change of language:
Chapter «Language»




Future change of profile:
Chapter «Profile»



Chapter
«Calibrate Device»




Chapter «Battery Level Indicator»



Chapter «Search Mode»

COCKPIT GROUP CHECK / SEND AND RESCUE-SEND


GROUP CHECK




Chapter «Battery Level Indicator» und «Turning the device on»




Chapter «Group Test»



Chapter «Group Test»




Chapter «Group Test»




Chapter «Send mode»



Chapter «Group Test»




Chapter «Group Test»



Chapter «Group Test»

SEND MODE




Chapter «Send mode»




Chapter «Burial and Vital Duration»


RESCUE-SEND MODE




Chapter «Rescue-Send Mode»




SEARCH -> SEND




Chapter «Rescue-Send Mode»



Chapter «Rescue-Send Mode»



Chapter «Rescue-Send Mode»



Chapter «Auto-Revert to Send»

COCKPIT SEARCH IN THE BASIC PROFILE

SIGNAL SEARCH

Chapter «Signal Search»

Search strip-width 25m!
OK

COURSE SEARCH

Chapter «Fine Search»

Hold device horizontally!
OK

Stand still!
OK

Chapter «Limitations»

Chapter «Search for Multiple Buried Subjects» and «Limitations»

FINE SEARCH

«User Guidance in the Assisted Fine Search»

«Probe Indication»

REVERT TO SEND

Chapter «Search for a Single Buried Subject Using the Standard Mode»

SEARCH -> SEND

Switch to SEND...

((SEND))
Vital data
Chapter «SEND Mode»

COCKPIT SEARCH IN THE ADVANCED PROFILE

STANDARD SEARCH MODE IN THE ADVANCED PROFILE

Chapter «List of Buried Subjects» and «Multiple Rescuers»

Chapter «Deep Burials»

Chapter «Triage» and «Vital Data Detection»

CONFIRM MARK!
Yes No
Chapter «Fine Search»

ERASE MARK?
Yes No

CONFIRM SWITCH!
No Yes

ANALOG MODE

Chapter «Limitations» and «Analog Search Tone»
Press keys for 3 sec!

Switch to Analog Mode?
Yes No

Chapter «Analog Mode»

Chapter «Search for a Single Buried Subject Using the Standard Mode»

ANALOG MODE WITH MANUAL VOLUME CONTROL

Chapter «Limitations» and «Analog Search Tone»
Press keys for 3 sec!

Chapter «Analog Mode»

Chapter «Manual Volume Control in Analog Mode»

Chapter «Search for a Single Buried Subject Using the Standard Mode»

OPERATION WITH EARPHONES

Earphones connected
OK
Chapter «Earphones»

Earphones disconnected!
OK

INITIAL SETUP

2. Initial Setup


2.1 Emergency Plan

Before you use the device for the first time, remove the protective foil on the front side and stick the emergency plan on the back of the battery compartment lid.

2.2 Insert / Replace Batteries

Only use alkaline (LR03/AAA) or lithium (LR92/AAA) batteries of the same type. Always insert 3 new batteries of the same type. In case these batteries need to be removed, the same 3 batteries or 3 new batteries need to be reinserted. **Never use rechargeable batteries** and always replace all the batteries at the same time.

Make sure the lid is properly closed and that the device and the batteries stay dry. Periodically inspect the battery compartment. Clean or dry it, if needed, since moisture can cause corrosion. Avoid touching the contacts with your hands.

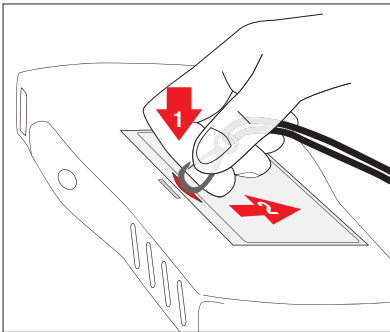

A reliable power supply is crucial for the safe operation.



2.2.1 Important Points When Using Alkaline Batteries Type LR03/AAA

When storing or not using the transceiver for an extended period of time (i.e. in the summer), remove the batteries and leave the battery compartment open. The warranty becomes void if batteries have leaked! When reinserting the batteries, use the same 3 batteries or 3 new batteries.



2.2.2 Important Points When Using Lithium Batteries Type LR92/AAA

Lithium batteries are extraordinary long-lasting, cold-proof and do not leak. The usable energy in low temperatures is higher compared to alkaline batteries. This battery technology is the best choice for the application in an avalanche rescue transceiver.



2.3 Device Setup

When turning the device on for the first time and switching to SEND, the user language and profile must be selected.

Afterwards, the user will be prompted to calibrate the device.

All settings may be modified later at any time.

Press the ◊-key to change the current selection and confirm by pressing the ○-key.

In the «Cockpit Initial Setup» you find a step-by-step setup guide.

2.3.1 Language

This setting allows you to select the language of your transceiver's user interface

2.3.2 Profile

The profiles allow to adapt your PULSE Barryvox quickly and easily to your user profile. The selected profile is shown during the start-up of the device.

Determine the most suited profile of the device:

Which one of the statements below fits you best?

*The **Basic Profile** is my choice if:*

- I am novice or I did not much familiarize myself with this topic up to now. I start with the basic search mode which uses only one-button and does not have any additional functions. After some exercise, I may switch to the more sophisticated «Advanced Profile».
- I use this device only for my rudimentary trained participants/guests

*The **Advanced Profile** is my choice if:*

- A: I am familiar with the «Basic Profile» and would like to achieve a better performance in avalanche rescue.
- B: I know how to interpret analog sound and for demanding search scenarios I would like to be able to take advantage of the comprehensive search modes of the «Advanced Profile».
- C: I use the device for my profession, I am group leader or in another way in an accountable position. My avalanche rescue transceiver needs to be able to provide a 100% solution to all search scenarios.

Settings in the Advanced Profile:

The Advanced Profile gives you access to a comprehensive choice of settings.

Group A, B and C: Adapt the settings to your requirements and capabilities.

Group B and C: It is strongly recommended to choose the following settings:

Analog Mode = manual, Audio support <3m = off (see chapter «Settings»)

2.3.3 Calibrate device

Your PULSE Barryvox® contains an electronic compass which provides a rapid adjustment of the direction indicator and extends the display range to 360 degrees.

To function properly, the compass must be calibrated after each battery replacement or after you have traveled for a long distance. The need to calibrate the compass is automatically detected when the batteries are replaced. This is, however, not the case if you travel a long distance.

Hold the device horizontally and press any key to start the calibration procedure. Rotate the horizontally held transceiver slowly and with constant speed clockwise until the message «Device calibrated!» appears.



Verify W-Link Region Setting

Verify that your PULSE Barryvox® is set to the appropriate W-Link region for your country (wireless radio link). Please pay attention to the information in the «Barryvox Legal and Regulatory Guide» and the chapter «W-Link». For countries without W-Link approval, transmission and reception of vital data is not possible. (Chapter «Triage Criteria and Vital Data»).

Carrying system

Adjust the carrying system to fit your body. (Chapter «Carrying positions»).


3. Start Menu and Settings

To access the „Start Menu”, switch the device from OFF to SEND and press any button within the first 5 seconds. The confirmation „activated” appears at the bottom of the screen. The start menu opens and the first entry „Group Check” appears. Immediately press the ◊-key, to get to access the different functions. Confirm your selection by pressing the ○-key.

3.1 Content of the start menu in the basic profile


3.1.1 Group Check

Before a party takes off, the transceivers of all party members must be checked. You find the detailed instructions in the chapter «Group Check».




3.1.2 Language

This setting allows you to select the language of your transceiver’s user interface




3.1.3 Profile

The profiles allow to adapt your PULSE Barryvox quickly and easily to your user profile.



3.1.4 Adjusting the Screen Contrast

The contrast of the screen may be adjusted in the start menu. Optimize the contrast of the screen by pressing of the ◊-key. Confirm the best setting by pressing the ○-key.



3.1.5 Owner

The PULSE Barryvox® allows you to enter your name, address, and other information, such as your phone number or e-mail address. This information is displayed every time the transceiver is turned on, so that the owner can be identified immediately anytime. We recommend that you enter this information.



Due to restrictions in the number characters per line and overall space, the data entered must be limited to information necessary to identify the device and return it to its owner.


By pressing the ◊-key briefly, the cursor on the bottom line moves to the right. By pressing the ◊-key longer, the cursor moves to the left. Pressing the ○-key confirms your selection.

Beware of the meaning of the following icons:


- New line
- Move cursor to the left
- Move cursor to the right
- Backspace
- Save and exit

3.1.6 Maintenance

In the maintenance tab in the start menu, the date of the next check as well as the software (SW) and hardware (HW) version can be displayed.



3.2 Overview Start Menu in the Basic Profile

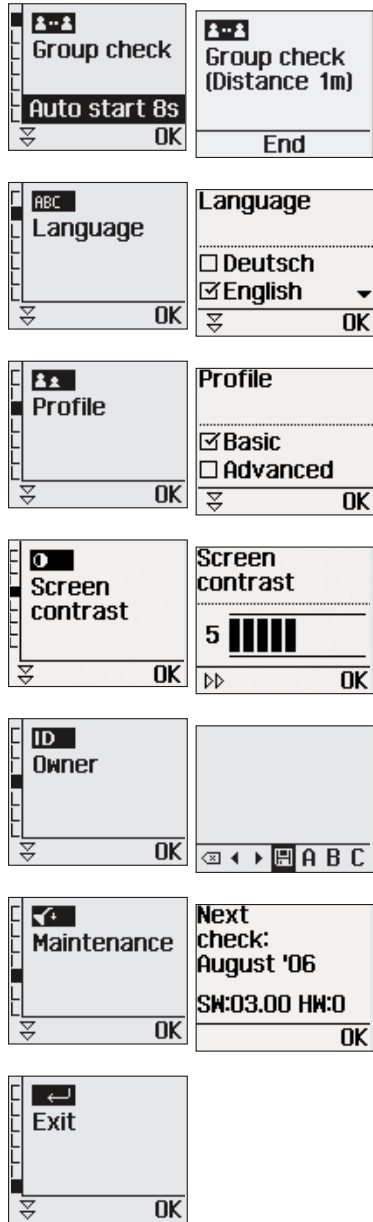

Bold print = default factory settings

- Group check
- Language
 - German**
 - English
 - French
 - Italian
 - Spanish
 - Swedish
 - Norwegian
 - Japanese
- Profile
 - Basic
 - Advanced
- Contrast
- Owner
- Maintenance
 - Next check
 - SW
 - HW
- Exit


Hidden, unchangeable settings of the Basic Profile

- Analog mode = **No Analog**
- Selection of burials = **Off**
- Analog tone = **Off**
- Audio support < 3m = **On**
- Pinpoint view < 3 m = **Assisted**
- Auto-revert to SEND = **4 min**
- Group Check Distance = **Touring**
- Vital data = **Send only**

The Basic Profile presents itself with an unchangeable range of functions and information which are specifically optimized for rudimentary trained users. In the Basic profile, the user only hears artificial beep sounds, it never plays the analog sound, therefore the tone information is always focusing on one buried subject only, the one which is currently being searched for. During search, no vital data information is shown. The automatic selection of the closest buried subject replaces the possibility to manually choose in the list of buried subjects. The user does not have access to analog mode, therefore the buttons during the search are only used for marking (one-button user interface).

3.3 Overview Start Menu in the Advanced Profile

- Group check
- Language
 - German**
 - English
 - French
 - Italian
 - Spanish
 - Swedish
 - Norwegian
 - Japanese
- Profile
 - Basic
 - Advanced
- Contrast
- Owner
- Maintenance
 - Next check
 - SW
 - HW
- Settings
 - Analog mode
 - Auto**
 - Manual
 - Audio support < 3m
 - On**
 - Off
 - Pinpoint view < 3 m
 - Assisted**
 - Cross
 - Airport
 - Direction
 - Auto-revert to SEND
 - 8 min
 - 4 min**
 - Off
 - Group Check Distance
 - Touring**
 - Sledding
 - Vital data
 - On**
 - Off
 - Vital sensor test
 - W-Link
 - Available regions
 - Off
 - Calibrate device
 - Reset device
 - Exit

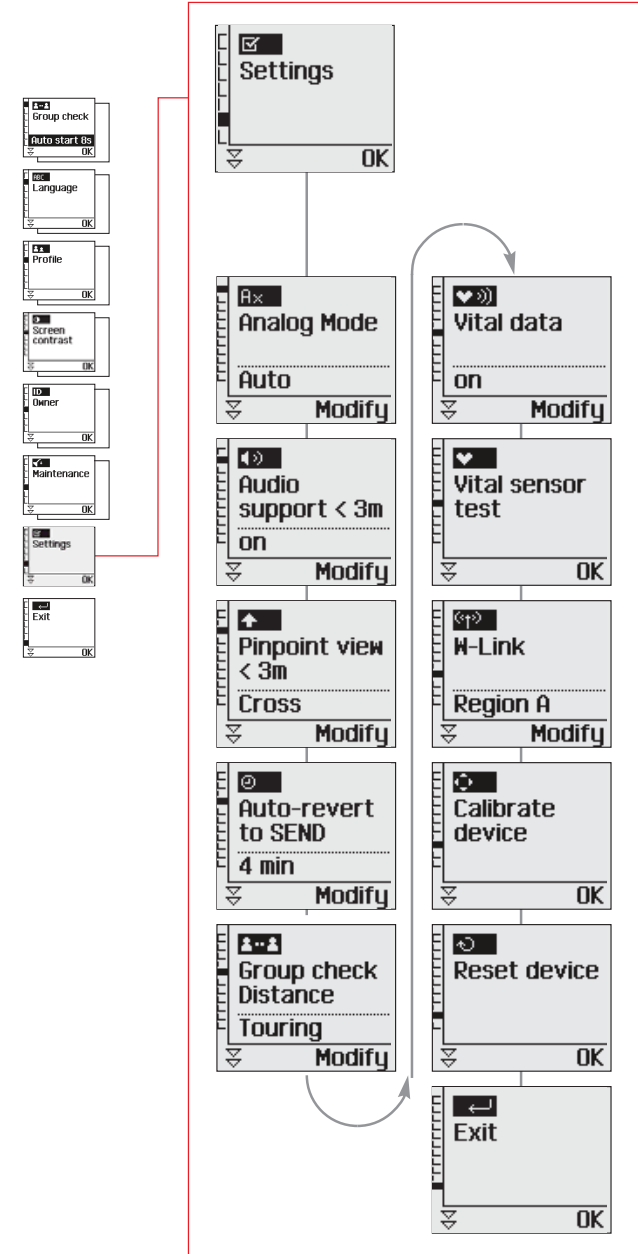

START MENU AND SETTINGS


3.4 Content of the start menu and settings in the advanced profile

The default settings of the device are configured optimally for normal use. **The start menu includes the same function as outlined in the chapter “content of the start menu in the basic profile”.** In addition, the “**settings**” allow advanced and professional users to activate additional functions and to adapt the setting to meet their specific requirements and preferences.

Most settings increase the level of detail shown on to the user as well as the amount of functions available. You should only change the default settings if you have a specific reason to do so.


3.4.1 Analog Mode

The analog mode allows the rescuer to solve even the most complex multiple burial situations and makes the PULSE Barryvox® a full-fledged avalanche transceiver. If the analog mode is set to «Manual», the experienced rescuer can adjust the volume manually, which can be very advantageous in certain situations. The setting “manual” is as well required to take advantage of an increased search strip width as described in the chapter “Extended Search Strip Width in Analog Mode”.




3.4.2 Audio Support Fine Search (< 3 Meters)

During fine search, the search for beginners is supported with an acoustic tone, which leads you in the right direction. For rescuers who can interpret the analog sound, it is highly recommended to disable this digital audio support as the more meaningful analog sound will then be available instead.




3.4.3 Fine Search View (< 3 Meters)

In fine search range, the Barryvox supports the rescuer with the “assisted fine search” function, which allows a user-friendly and precise fine search. In case you do not like this assistance, you may choose the setting “cross”, which gives you a dynamic cross view during fine search. Alternatively, the setting “direction”, leading you with the standard directional arrow during fine search, may be used by rescuers who are very familiar with the particular distribution of the field lines in close proximity to a buried subject.

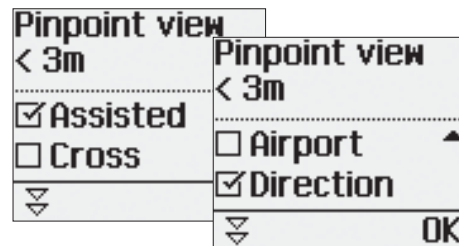


3.4.4 Auto-Revert to SEND

Auto-revert to SEND switches the transceiver from SEARCH mode to SEND mode if there is no user interaction or major motion for a specific amount of time. The default setting of 4 minutes is appropriate for most users. Only change this setting if you have an important reason to do so. The setting is critical for your personal safety! If you disable this setting, you will always see the warning symbol (⊗) in SEARCH mode.

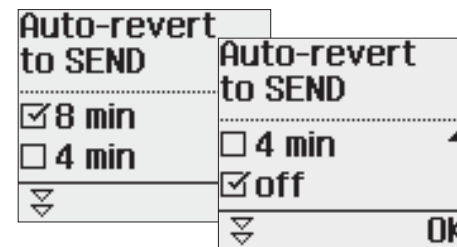

3.4.5 Group Check Distance


The group check distance defines the test distance during the group check. Choose «Sledging» (5m) for the motorized application and «Touring» (1m) for all other cases.



3.4.6 Vital Data

Your PULSE Barryvox® detects your vital data (see chapter „Vital Data Detection”) while you are buried and transmits these via the W-Link radio connection to the rescuers (default setting). In SEARCH mode, the Barryvox displays the vital status, provided the sender has enabled the W-Link and the ability to transmit vital data.

If you do not wish to have these data transmitted, you can disable this feature. Only change this setting if you have an important reason to do so. This setting can affect your chances of survival in a complete burial situation as well as those of buried subjects you are searching for.




START MENU AND SETTINGS

3.4.7 Vital Sensor Test

The PULSE Barryvox® uses a highly sensitive motion sensor to detect vital data in buried subjects.

To test the vital sensor position the transceiver the way you will be carrying it in the outdoors. (It is imperative to use the same clothing!) Lay yourself on the floor so that your body presses the Barryvox downwards and avoid any intentional movements.




Interpretation of the Test Results:

No tone:
The transceiver cannot detect any vital data.



Slow series of tones:
Vital data are being detected.

Rapid series of tones:
The sensor is detecting extensive motion, as experienced in ascent or descent. Avoid any movement to test the vital data detection reliably!



3.4.8 W-Link

The PULSE Barryvox® uses a W-Link radio transmission. Different countries have varying frequency regulations. The following world map shows the frequencies used in the individual countries. **Note that specific frequencies may not be used in certain countries. The frequency is factory set depending on the country of sale. The manufacturer declines all liability in the case of after-sale frequency modifications.** Please consult as well the Barryvox Legal and Regulatory Guide.

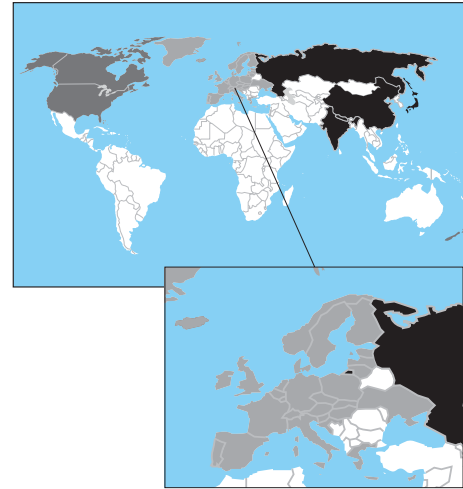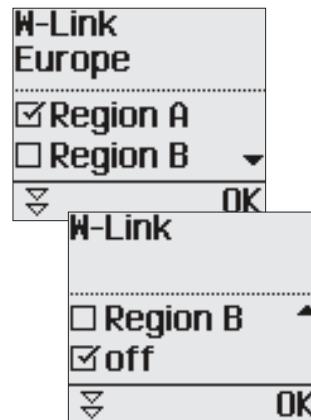

Frequency setting:

Region A / W-Link Frequency 868 MHz [= light grey]
EU- and EFTA-Member countries

Region B / W-Link Frequency 915 MHz [= dark grey]
USA, Canada and New Zealand

W-Link not allowed [= black]
Japan, Russia, India, China

unknown [= white]

3.4.9 Calibrate device


Your PULSE Barryvox® contains an electronic compass which provides a rapid adjustment of the direction indicator and extends the display range to 360 degrees.

To function properly, the compass must be calibrated after each battery replacement or after you have traveled for a long distance. The need to calibrate the compass is automatically detected when the batteries are replaced. This is, however, not the case if you travel a long distance.

Hold the device horizontally and press any key to start the calibration procedure. Rotate the horizontally held transceiver slowly and with constant speed clockwise until the message «Device calibrated!» appears.

3.4.10 Reset Device

The function «Reset device» allows you to restore all default factory settings. All modified settings are lost.



4. Setup

4.1 Handling the Barryvox

As all transceivers, the Barryvox contains shock-sensitive ferrite antennas. Therefore, you should handle it with utmost care!

Store the device and the carrying system in a dry spot that is protected from extreme cold or heat and direct sunshine.

It is recommended that you have the functionality tested at regular intervals (see chapter «Periodic Checks»).

4.2 Interferences

As a matter of principle, avoid having other electronic devices (e.g. mobile phones, radios, headlamps), metal objects (pocket knives, magnetic buttons), or other transceivers close to (20 cm in SEND; 50 cm in SEARCH) your running avalanche transceiver. The PULSE Barryvox® contains a magnetic compass. **You should not wear clothing with magnetic buttons! Users of pacemakers are advised to carry the device in a secure pant pocket (no vital data detection).** Consult the manufacturer's instructions with regard to the impact on pacemakers.

When searching, hold the device at a minimum of 50cm away from these objects and turn off any electronic devices, if possible. It is highly recommended to turn off mobile phones!

4.3 Carrying Positions

Regardless of the carrying position, the display should always face your body!

The detection of vital data is only possible if you carry the device in the carrying system. (Chapter «Triage Criteria and Vital Data»)

Before you use the device for the first time in the outdoors, or when you decide to carry the transceiver in a different manner, we recommend that you test the vital data sensor (Chapter «Vital Sensor Test»).




4.3.1 Carrying System (Recommended Carrying Position)

The carrying system has to be put on your innermost layer of clothing prior to beginning the trip (see illustration) and has to be worn on your body for the duration of the trip. **The transceiver shall always remain covered by one layer of clothing.** The device itself is inserted into the carrying system according to the illustration. It should always remain anchored to the base plate of the carrying system using the red hook on the wrist loop.



4.3.2 Carrying the Transceiver in a Pocket (without vital data detection)



If you carry the Barryvox in a pant pocket, the zipper must remain closed for the duration of the trip. Always use a secured pocket (see illustration). If possible, attach the wrist loop to your pants or secure it around your belt.

4.4 Turning the Device On

When the main switch is moved from the OFF to the SEND or SEARCH positions, the transceiver is turned on. To slide the main switch from OFF to SEND or SEARCH, unlock the main switch by pressing down the button at the top.

While starting, the device conducts a self-test. The microprocessor, the antennas, the sensors, and the display are checked. If the battery level is low, the self-test will not run.

If the self-test is completed successfully, the display will show «OK».

The remaining battery level is displayed as a percentage.



If the self-test fails, an error message is displayed for 20 seconds along with an acoustic warning. The meanings of the different error messages are described in the chapter «Troubleshooting».

4.5 Battery Level Indicator

The following table gives you average values for the battery levels.

The remaining battery level can only be displayed correctly if batteries are used according to the chapter «Insert / Replace Batteries» Low temperatures, age, and brand can have a negative impact on the battery life and the accuracy of the battery level indication.


100%:	<p>Normative Requirement (=minimum requirement) min 200hrs SEND at 10°C followed by 1hr SEARCH at -10°C</p> <p>Typical values for the PULSE Barryvox® with alkaline batteries: 250hrs SEND at 10°C Measured with Duracell ULTRA (initial set of batteries)</p> <p>Typical values for the PULSE Barryvox® with lithium batteries: 310hrs SEND at 10°C Measured with Energizer ULTRA and ADVANCED</p>
-------	---

less than
20% 
or 0% 

The batteries must be replaced as soon as possible!

Emergency reserve at 20%:
Max. 20 hrs in SEND mode and max. 1 hr in SEARCH mode left.



Battery capacity unknown : The battery capacity cannot be reliably determined. **The batteries must be replaced as soon as possible!**



The transceiver sounds a warning if the battery level is below 20% or unknown at startup.

Change between Alkaline and Lithium Batteries

As soon as one battery is removed and a reinserted or replaced, the device tries to recognize the battery type (alkaline or lithium).

The following user interactions may be shown:



Only confirm this questions if you really inserted 3 new lithium batteries, which have never been used before in any other device.



Only confirm this question, if you have removed one or multiple batteries and reinsert now the same, in the meantime never for any other purpose used batteries (i.e. batteries you have removed over the summer).



Only confirm this question if you exclusively inserted alkaline batteries.




If you mix alkaline and lithium batteries, or try to use lithium batteries which have already been used in other devices, it is impossible to determine the battery capacity.

4.6 Group Check

Single Group Check

Before a party takes off, the transceivers of all party members must be checked. To conduct this test, the function group check is activated on a single transceiver within the party. Activate the group check by switching the device from OFF to SEND and pressing either of the keys within the first 5 seconds. After a few seconds, the device will automatically activate the group check. Make sure all the other transceivers of the party are in SEND mode.

The test is successful if you can clearly hear beep sounds from each participant's transceiver within the range indicated on the display. The members of the party must be spread out appropriately to avoid mutual interference. The indicated test distance must not be shortened, as otherwise the group check becomes very unreliable.




If no tone is heard within the indicated range, the device may not be used.

How to solve the problem:

1. Check if the device is switched to SEND.
2. Replace the batteries.
3. Have the device checked by the manufacturer. (chapter «Maintenance and Repair»)

After 5 minutes in group check, the transceiver automatically switches to the SEND mode. The user is warned ahead of time by an acoustic alarm. This automatic switching can be prevented by pressing any button within 20 seconds. After the group check, the transceiver must be switched to the SEND mode by pressing any button.

If your PULSE Barryvox® detects that the transmit frequency of the tested device is not within the normative regulations, a warning message will be shown. In this case, repeat the test with 5 m distance between the participants to identify the defective transmitter. Such devices must be checked/repaired by the manufacturer.

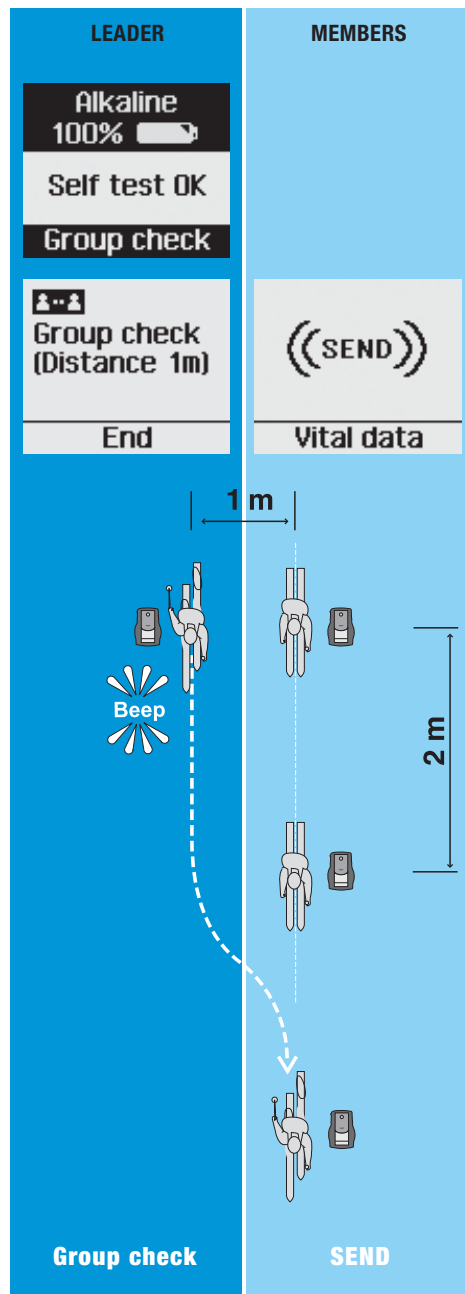


Double Group Check

We recommend to perform a double group check ones a week and in general when a new group gets together.

The double group check individually tests the SEND and SEARCH function of all devices.

The members of the party activate the group check on their transceivers or set them to a low receive volume. The leader switches his or her transceiver to the SEND mode and ensures that all party members can receive. Subsequently, the party members switch their transceivers to SEND, and the leader activates the group check or sets the transceiver to a low receive volume. The SEND mode of all transceivers is checked, and ultimately the leader switches his or her transceiver to SEND.

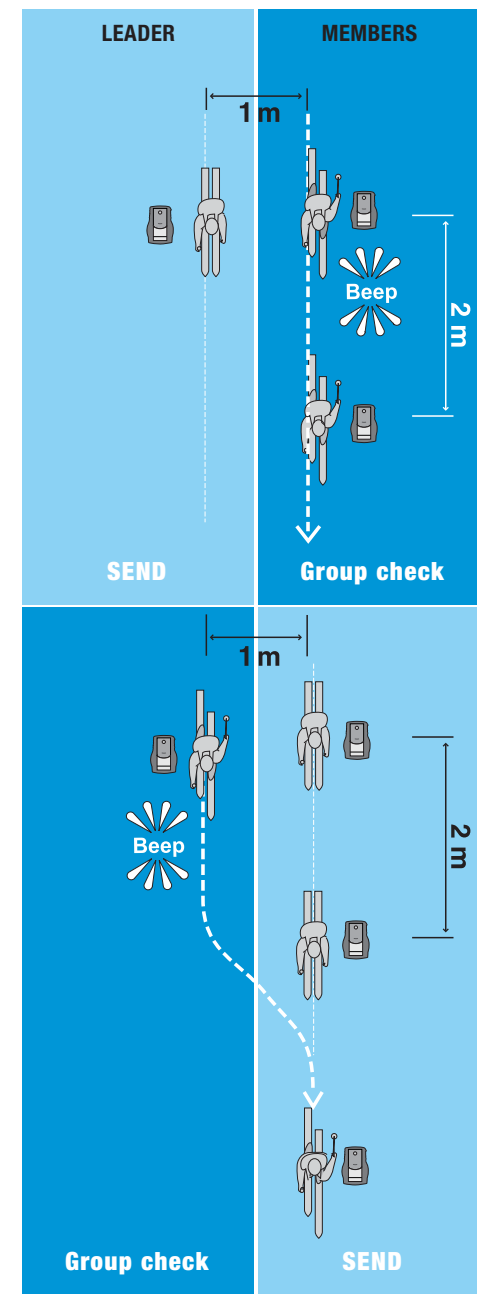

5. SEND Mode

The SEND mode is the normal operating mode outdoors or in all other situations in which there is a risk of avalanches.

Each time the SEND mode has been activated, this is confirmed by a triple beep sound.

Each individual signal pulse is tested. If the test is successful, this is confirmed by a blink of the red SEND-Control LED.

The LCD display is automatically deactivated in the SEND mode, but can be activated any time by pressing either of the keys.

In case of a burial (or whenever the transceiver stops moving), the device records the burial duration and detects vital data. These are displayed on the buried device and transmitted via W-Link to all other transceivers capable of receiving vital data.



See chapter «Burial and Vital Duration».



5.1 Rescue-Send Mode (Rescue-SEND)

The rescue send mode is used by all rescuers who are involved in the rescue operation, but do not perform a transceiver search themselves (shovelers, probe line, surface search, search with other search devices etc.). The rescue send mode monitors the motions of the rescuer and only activates the transmitter, when the activity level of the rescuer is during 4 minutes on such a low level that it has to be assumed that this is an involuntary state of inactivity caused by a secondary avalanche. Prior to reverting, the device will sound an audible alarm. Reverting can be avoided if either of the keys is pressed within 30 seconds of the alarm.

To activate the rescue send mode, switch the device to SEARCH and revert to SEND. Wait until the 5 sec. count-down has completed, "Rescue-SEND" is now shown at the bottom of the screen. As soon as you hear 3 ascending beep-sounds, immediately press any key. The activation of the rescue send mode is confirmed by 3 descending beep sounds and the double flashing of the red SEND-Control LED. If you switch between SEND and SEARCH during the further rescue operation, the device always used the rescue send mode when the main switch is in the SEND position. Turn the device off and on to return back to the normal send mode. In the «Cockpit Rescue-SEND» you find a step-by-step setup guide.



6. SEARCH Mode

Although the avalanche transceiver is easy to use, its effective use requires proper training. We recommend that you practice transceiver searches regularly.

Electronic devices and metal objects can interfere with the search or make it impossible.

See chapter «Interferences».

Be aware that electronic devices used by other rescuers may disturb the search. This is equally valid for mobile phones, therefore it is highly recommended to switch off phones with are not absolutely required.


At the beginning and during the search, pay close attention that the rescuer's transceivers are not transmitting and do not switch to SEND unintentionally.

It does not make sense to remove the backpack and mount the shovel and probe already at the boarder of the avalanche. Keep the backpack with all the equipment on you! The assembled shovel and probe is only a hindrance during signal and course search. Only remove your pack to assemble probe and shovel ones you have successfully concluded the fine search.

6.1 Search Phases

In an avalanche search, the following phases are distinguished:

- Signal search
 - Coarse search
 - Fine search
 - Pinpointing
- } using transceiver
- } using probe

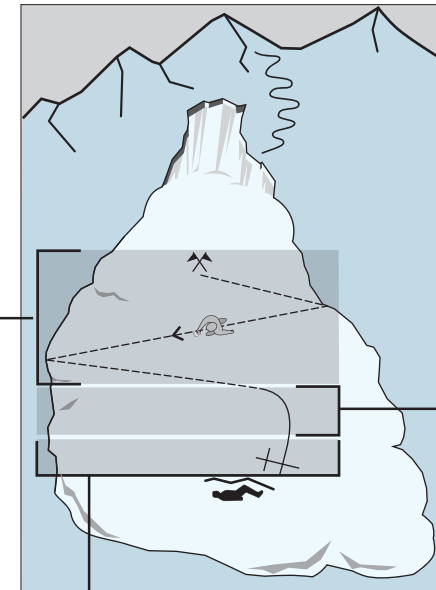

Signal search:
Search area to the point where the first clearly audible signal can be detected.


Coarse search:
Search area starting from the reception of the first signal until the immediate vicinity of the buried subject. In this phase the signal search pattern is abandoned in order to follow the signals leading to the buried subject.

Fine search:
Search area in the immediate vicinity of the buried subject.

Pinpointing:
First use of the probe until probe hit.

SEARCH MODE

The transceiver search is comparable to the landing of an airplane!

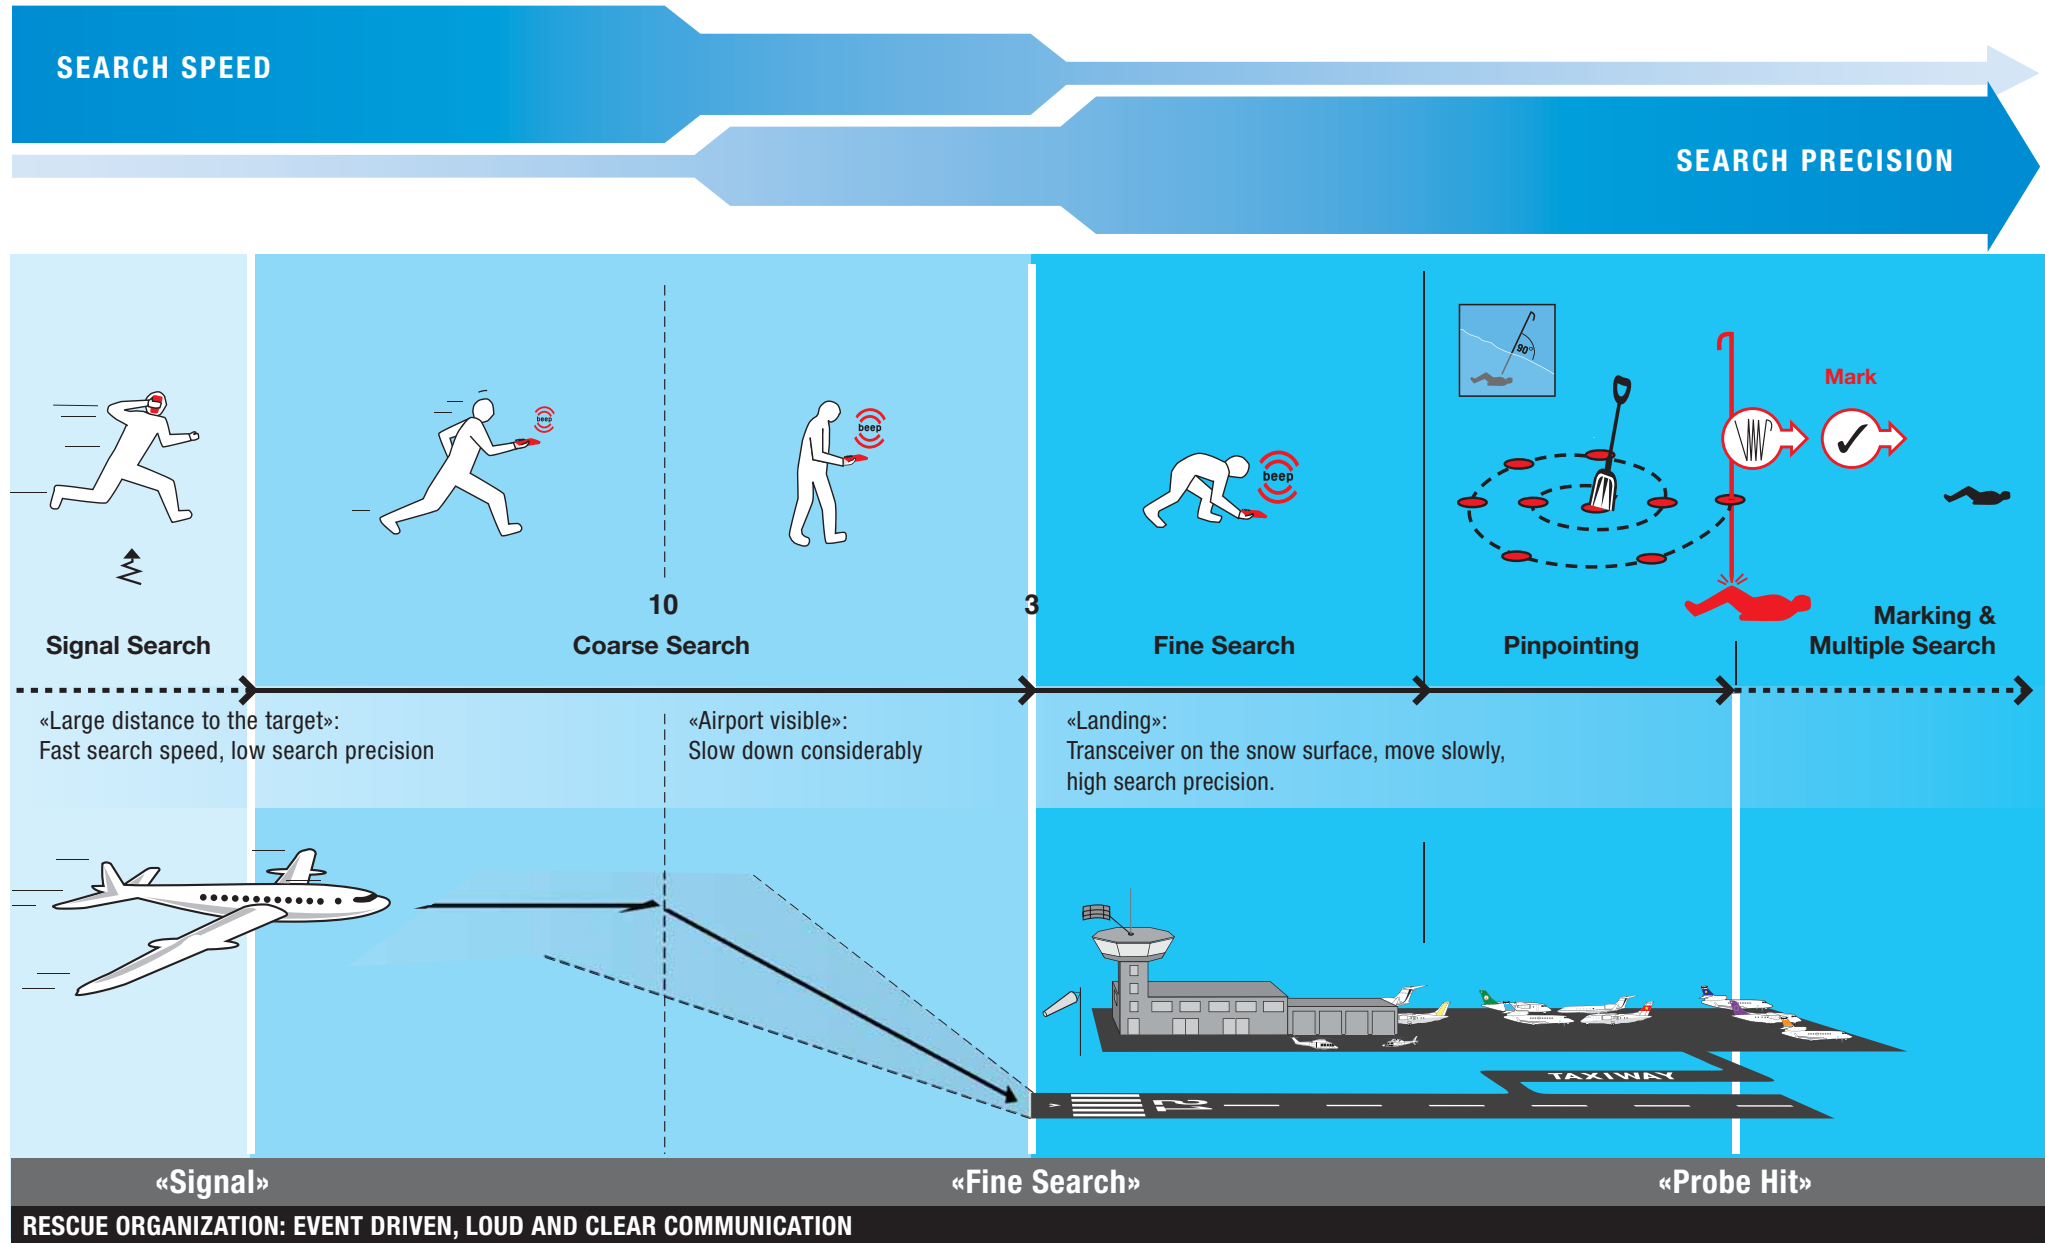

SEARCH MODE

6.1.1 Signal Search

From the start of the search until you clearly hear the first tone, you are in signal search. The avalanche surface is searched systematically until you pick up a signal. During the acoustic signal search, the rescuer has the visual focus on the surface of the debris in order to be able to see body parts or objects protruding the snow surface.

The PULSE Barryvox® uses the symbol  as a generic instruction to apply one of the following search patterns for new signals!

Optimization of Range




To optimize the range, rotate the transceiver slowly around all axes. Hold the device with the loudspeaker facing your ear sidewise of your head.

Once a signal is received, maintain the device orientation and continue walking until the signal can be heard clearly. The signal search is concluded.



If your Barryvox® detects that the signal search strip width needs to be reduced due to a device transmitting far apart from the normative regulation, the reduced search strip width will be indicated.

Regardless of the operating mode, the following search strategies apply:

Search strategy if the last seen point is known. The signal search strip extends downhill from the last seen point in the direction of the slide.

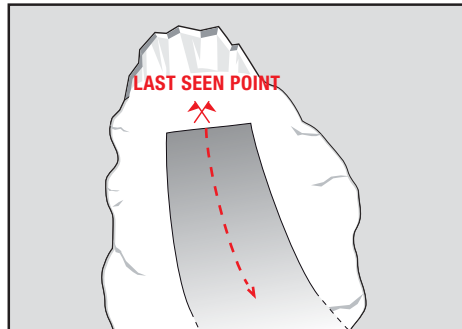


Search strategy if the last seen point is unknown.

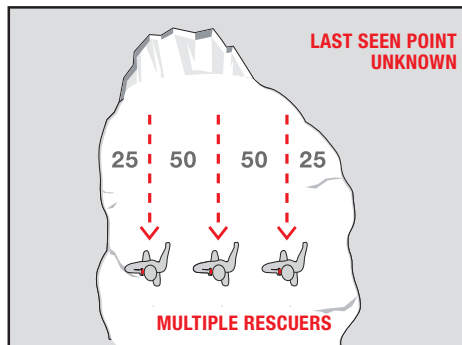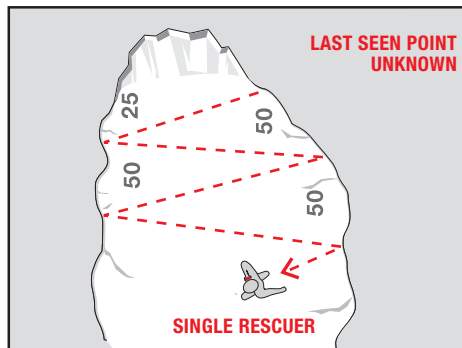

6.1.2 Extended Search Strip Width in Analog Mode

The search strip width can be extended from 50m to 80m by experienced users. For this, the setting "Analog Mode" must be set to "Manual" (see chapter "Settings"). For the signal search with extended search strip width, switch to Analog Mode by pressing both lateral keys simultaneously until the search mode has switched to "Analog". Press the (KREIS)-key multiple times until the screen is blank - the search strip width is now 80m. Search the avalanche systematically. When you receive the first signal, follow it based on the analog sound in the direction of the strongest signal (tangent search). When the signal clearly rises, the screen switches back on automatically. Switch now back to the standard search mode by pressing both lateral keys simultaneously and conclude the search by following the distance and direction indications.

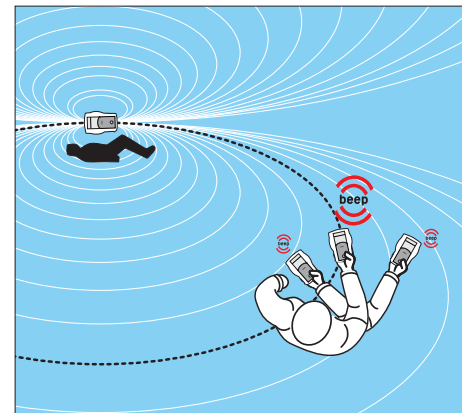

Tangent Search System


6.2 Auto-Revert to SEND

Auto-revert to SEND automatically switches the transceiver from the SEARCH mode to the SEND mode if no user interaction or movement occurs during a certain amount of time (default 4 minutes). Prior to reverting, the device will sound an audible alarm. Reverting can be avoided if either of the keys is pressed within 30 seconds of the alarm.

In case rescuers are buried in a second avalanche, this function allows them to be located using transceivers.

Elementary understanding of transceiver search

The 457kHz transmitter of the transceiver has a special, kidney shaped transmit distribution, which is visualized with field lines in the illustration below. The searching transceiver leads the rescuer along the field lines and therefore usually not in a straight line to the buried subject.

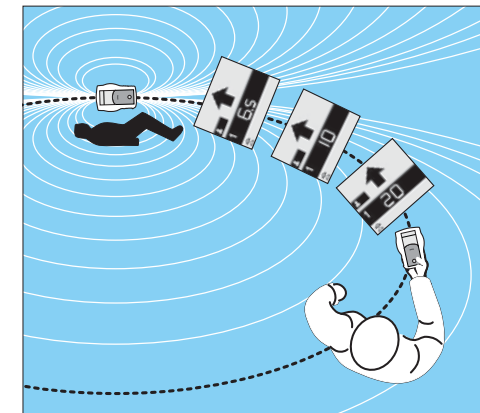


Search Along the Field Line: Flux line search

SEARCH MODE

6.3 Standard Mode

As soon as the device is switched to SEARCH, it is operating in standard mode. This mode enormously facilitates a rapid location of a buried subject. The described standard search mode is based on the «Advanced Profile». Concerning the search mode of the «Basic Profile», please consult the «Quick Reference».


6.3.1 Transceiver Operation



The \diamond -key is used to manually select a specific buried subject.



If none of the buried subjects are selected, the device displays the symbol for the signal search \mathbb{E} and advises you to search the avalanche for additional signals.



If you are in close proximity (<6.0) of a buried subject, you can mark that location by pressing the \circ -key.

6.3.2 Search for a Single Buried Subject Using the Standard Mode

Coarse Search

The analog tone is the first signal that is received at long distance.

If the distance to the buried subject is less than approx. 60 meters, the distance and direction are displayed. The sensitivity (volume) of the receiver is adjusted automatically to optimize the processing of the signal.

Interpretation of the Distance Indication

The distance indication shows the longest possible distance to the buried subject in meters. The buried subject may be much closer, but never ever further apart from the rescuer.

The distance can never be determined exactly. It is important whether the numbers are increasing or decreasing. The closer you are to the transmitting device, the more precise the indicated distance is.


Practical Search Instructions

Hold the transceiver horizontally in front of you and proceed in the direction indicated by the arrow. If the distance increases, you are moving away from the victim. Continue the search in the opposite direction. The transceiver will lead you to the buried subject quickly and reliably.

Do not move backwards, otherwise the direction indication will be incorrect.

Start the search at a high speed and reduce your speed as you close in on the buried subject. Operate the transceiver in a quiet and concentrated manner – avoid rapid movements. This way, you will reach the objective in the quickest and easiest manner!

User interface in the standard mode

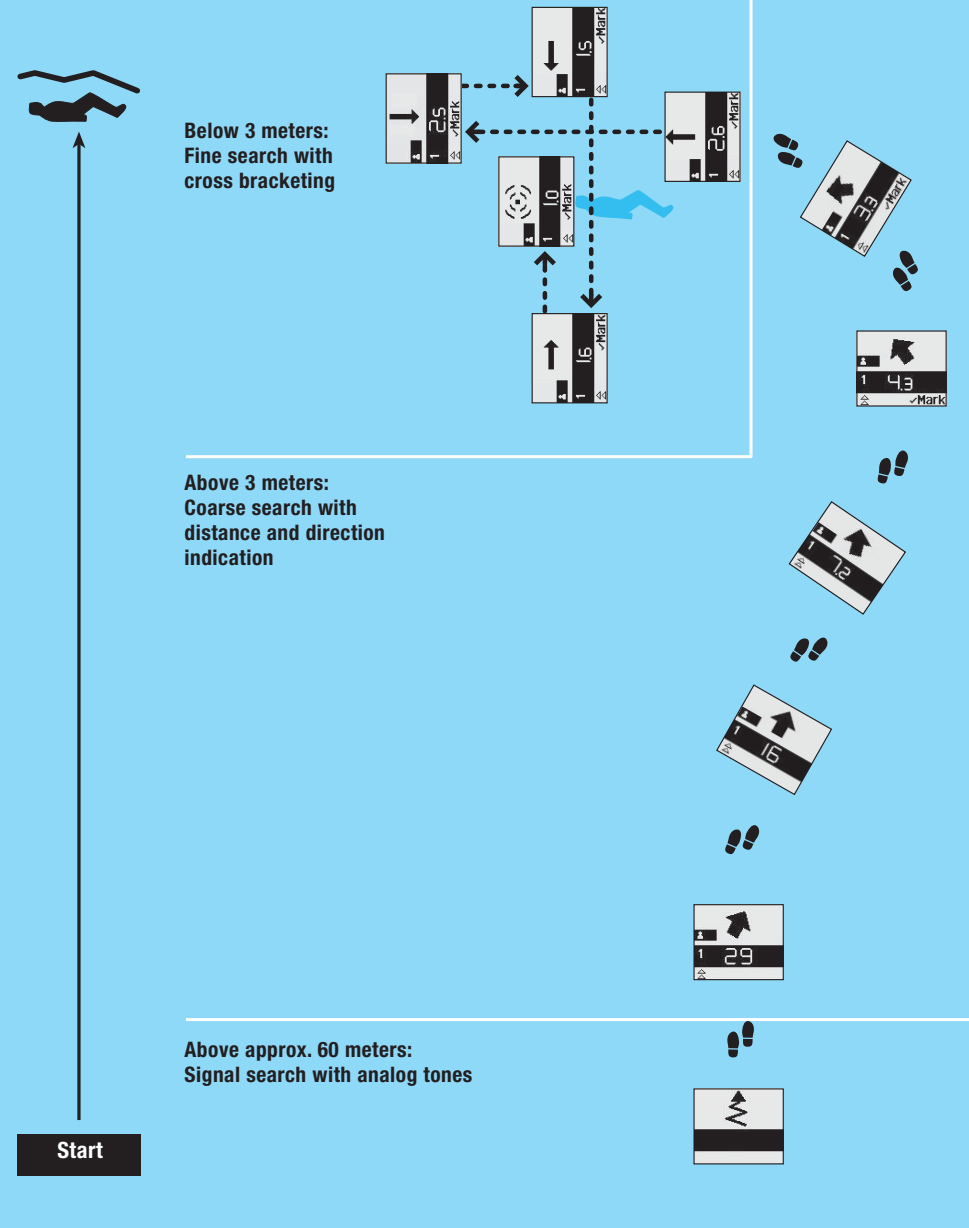

Fine search

During this search phase hold the transceiver directly above the snow surface! In the assisted fine search, you will be guided in a systematic cross search pattern to the point where the further search is faster and more efficient with a probe.

Keep the device and your body during fine search always in the same orientation, when searching in a strictly perpendicular coordinate system shortens the search time and increases the search precision. The points where the device indicates a change of direction or the final probing indication correspond mostly, but not always with a point of lowest distance indication.


The greater the remaining distance to the buried subject / burial depth, the more repetitions of fine search crosses may be required to reach a sufficient fine search precision. The device tries to determine these parameters and guides the rescuers accordingly through one or multiple fine search crosses - until the optimal point to start pinpointing with the probe is reached. This spot is indicated by the probe indication ☉. Immediately place an indicator, i.e. a ski pole at this spot as an important reference with applying the probing spiral.

Open your backpack now and assemble probe and shovel. It is recommended to put your backpack immediately back on your shoulders, in particular if you use a back pack with an airbag or Avalung. In the seldom case of a secondary avalanche, this allows you to take advantage of the safety gear. By strictly keeping the equipment (i.e. first aid kit, radio or mobile phone) with you in your back pack, you will always have it available when you need it while rescuing the subsequent buried subjects.



User Guidance in the Assisted Fine Search

Guidance on the vertical axis while searching in a cross




Direction indication on the vertical axis.



Direction indication on the vertical axis when the deviation point to the horizontal axis could not be conclusively determined in the first search sequence. Reduce the search speed and repeat the search on the vertical axis by holding the device directly above the snow surface.

Guidance on the horizontal axis while searching in a cross



Direction indication on the horizontal axis.




Direction indication on the horizontal axis when the deviation point to the vertical axis, respectively to start pinpointing (probing) could not be conclusively determined in the first search sequence. Reduce the search speed and repeat the search on the horizontal axis by holding the device directly above the snow surface.

Probe Indication



Indication to proceed from fine search to pinpointing.

Stash the device in search mode on your body (i.e. pocket) in order to have both hand available to probe. Apply now the probing spiral, the probe is applied in a 90° angle to the snow surface. In particular if the debris are hard, guide the probe with two hands, one pushing from the top, the other leading the probe closer to the snow surface in order to avoid that the probe gets deformed. Keep

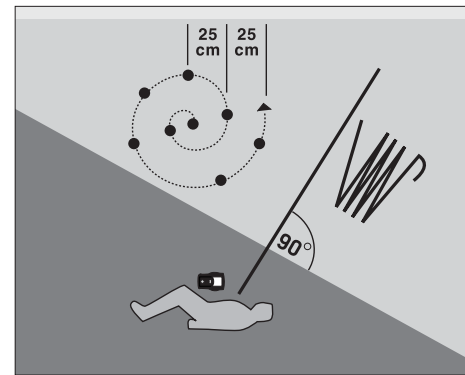


in mind that the remaining distance shown on the screen indicates the maximum possible distance to the buried subject. If you see i.e. 1.1 on the screen, the buried subject must be within 1.1m probing depth and spiral probe radius. In case there is no probe hit within this area, you have for sure missed the buried subject. Repeat probing with a slightly offset probing pattern (chapter «Pinpointing with Transceiver and Probe Pole»).

Do not mark the buried subject as found using the ✓-Mark function before you have successfully located it by a probe strike! Do not hold the device back to the snow surface to mark!



In case the assisted fine search in a cross does not lead to success within a predefined timeframe, the fine search cross will be indicated. Determine the point with the shortest distance indication by a systematic, manual cross search holding the transceiver directly above the snow surface. In this scenario, the probing indication will not be shown. Apply the probing spiral at the point of the lowest distance indication.



The Barryvox searches now for further buried subjects. The device leads you directly to the next buried subject or indicates that the remaining debris need to be systematically searched in a signal search pattern (chapter «Signal Search»).

Search Tones in Fine Search

In the fine search range, thus in the immediate vicinity of the buried subject (approx. <3m), the Barryvox assists you with an artificial, distance and action related sound while fine searching in a cross pattern.

For rescuers who can interpret the analog sound, it is highly recommended to disable this digital audio support as the more meaningful analog sound will then be available instead (see chapter «Audio Support Fine Search»).

Erase Mark

A mark can be removed by selecting the buried subject with the ◊-key and selecting «Erase mark» with the ○-key. You can only remove the mark if you are in the immediate vicinity (<6 m) of the buried subject.

Deep Burials

The transceiver tries to detect high burial depth and, if required, dynamically increases the fine search range. If a buried subject is marked with a distance reading above 3 m, an additional safety dialog appears asking you to confirm the successful location of the subject. Marking a buried subject in more the 6 meters depth is not possible. For further information, please see chapter «No Probe Hit».


6.3.3 Search for Multiple Buried Subjects Using the Standard Mode

In standard mode, the transceiver attempts to analyze all the detectable signals and to determine the number of buried subjects. This is possible, because all the signals from one transmitter display characteristics, which are distinguishable from the signals from other transmitters. The more unique the signal characteristics are, the more accurately the signals can be distinguished and located (pattern recognition). By automatically associating the signals with their respective sources, multiple burial situations can be solved without applying specific search tactics. Transceivers which additionally transmit W-Link information can be detected particularly fast and reliable.

List of Buried Subjects

The buried subjects whose transmit patterns can be identified are inserted in the list of buried subjects based on their signal strength. The closest buried subject on the avalanche is shown at the bottom, the furthest at the top of the list.


Procedure

1. The device favors the closest subject first. Locate the various buried subjects using the transceiver and probe pole (Chapter «Search for a Single Buried Subject using the Standard Mode»).
2. As soon as you mark an individual subject, the transceiver takes you to the nearest, unmarked buried subject.
3. Continue this procedure until all subjects are located and marked.
4. The rescuer now searches for additional buried subjects while the display shows the symbol for the signal search phase  to indicate that the rest of the avalanche surface must be searched (Chapter «Signal Search»).



The buried subjects are numbered in the sequence they have been found respectively marked. This allows a reliable assignment of an entry in the list to a buried subject on the debris.

Procedure for multiple burials

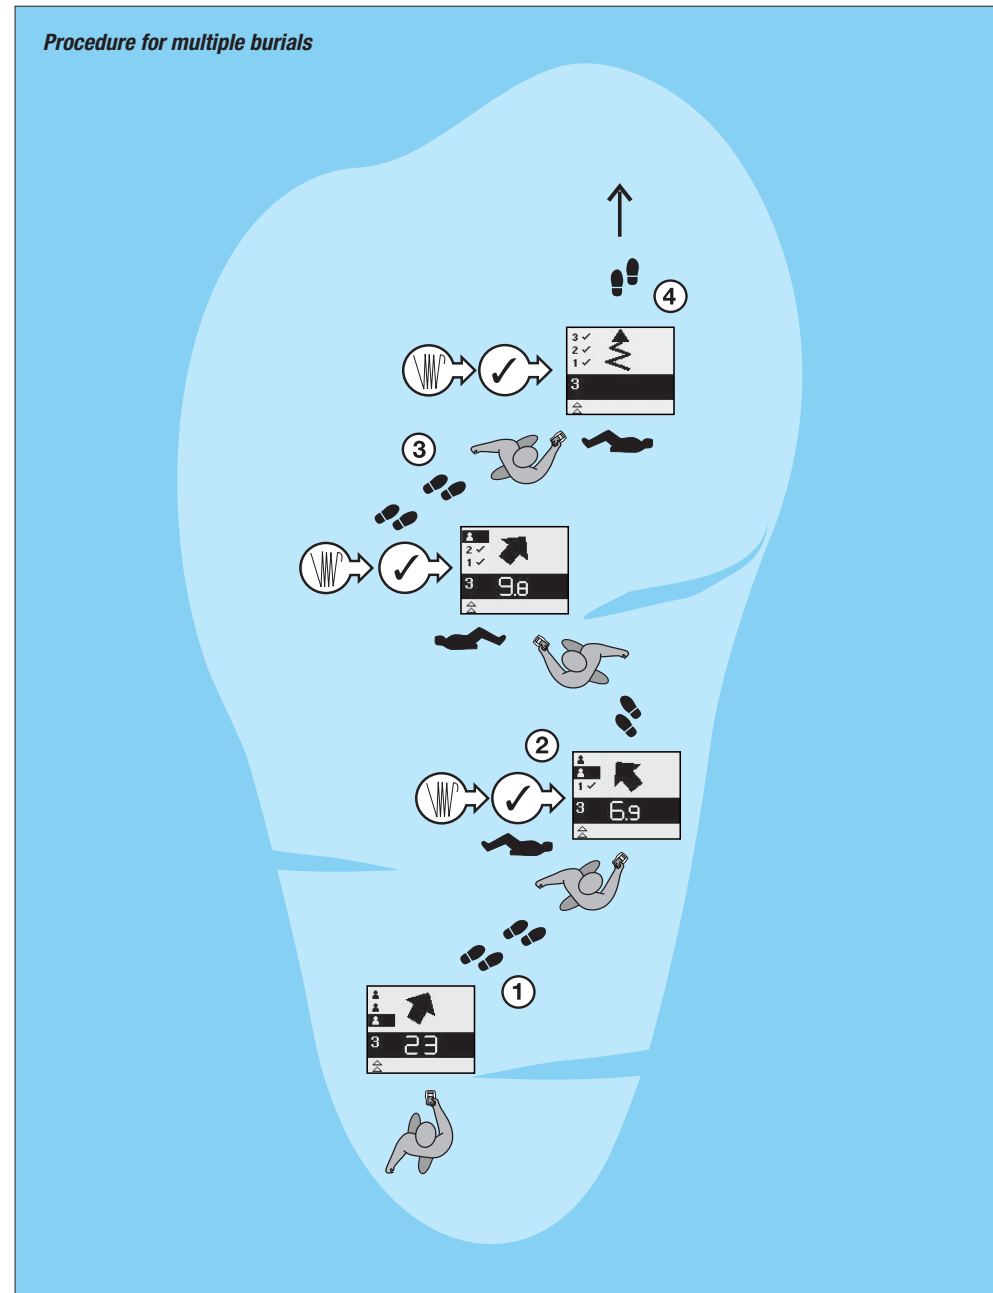

SEARCH MODE

Analog Search Tone

→ Interpretation of the Analog Sound

Just as in traditional analog transceivers, the analog tone is received by just one antenna. The change in the distance indication can therefore deviate from the change in tone volume. Depending on the relative orientation of the transmitter to the receiver, the tone volume and the distance indication may both decrease while approaching the buried subject.

The volume of the analog sound is automatically selected by the transceiver. Therefore, the volume of the sound cannot be taken as a decision criterion if you get closer or further away from the buried subject. However, increase and decrease of distance can be easily derived from the distance indication.

→ "Sound Check"

The analog sound is however very useful and important to easily and reliably determine the amount of buried subjects: Counting the amount of beep sound sequences gives the amount of buried subjects.

Use the following scheme to easily and reliably determine the amount of buried subjects between 1 and 3+.

1. Is it possible that this is only one buried subject?
No: at least 2.
2. Is it possible that these are only two buried subjects?
No: at least 3
- 3: Only for advanced rescuers:
Is it possible that these are only three buried subjects?
No: More than 3.

The amount of buried subjects has to be interpreted in conjunction with the distance indication / sensitivity level.

You hear three beeps and the distance reading jumps between 3.5 and 4.8 m. Therefore, three buried subjects can be expected within a radius of 5 m.

Always apply the "Sound Check" at the distance indication of 10 and 3!

Mental Map of the Burial Situation

How many buried subjects are in approximately what distance from myself (rescuer) and from each other?

The "Sound Check" provides the required information to build up the "mental map" of the burial scenario, which is a critical base information for many search strategic (which search strategy?) and logistical decisions (where how many rescuers and equipment).

Vital Data and Triage


If not enough rescuers are available to simultaneously search and excavate all buried subjects, buried subjects with increased survival chances, indicated by the ♥-symbol, should be searched and excavated with first priority.

Use the ◊-key, to purposely select in the list of buried subjects a buried subject which indicates "increased survival chances" by showing the ♥-symbol.


You can find more information on triage criteria and vital data in the chapter «Triage Criteria and Vital Data». The actual prioritization of certain buried subjects over others is up to the rescuer.

Search With Multiple Rescuers

When the search is conducted with multiple rescuers searching at the same time, it should be avoided that several rescuers search for the same buried subject. Use the ◊-key, to choose in the list of buried subjects which buried subject you are searching for.

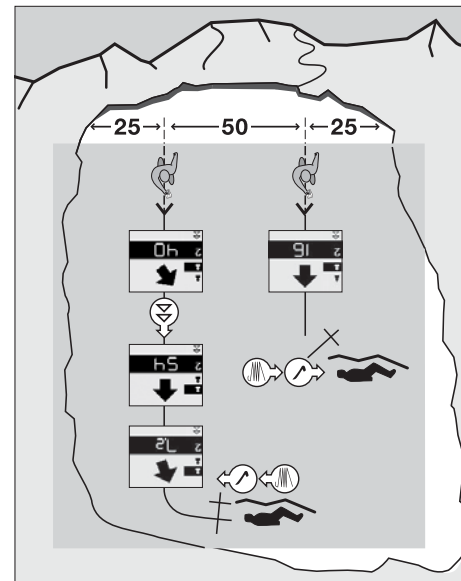

Situation 1: Two rescuers receive two buried subjects. One rescuer continues the search for the buried subject closest to him, the other rescuer should directly search for the second buried subject, without having to mark the first one. Therefore he presses the ◊-key, the second buried subject who is slightly further apart is now highlighted in the list and the rescuer will be lead to its position.

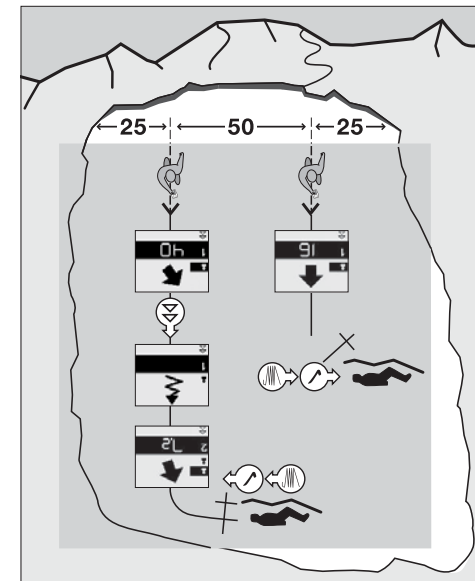

Situation 2: The two rescuers only receive one buried subject. One rescuer continues the search for the buried subject closest to him, the other rescuer should search the remaining of the avalanche for more buried subjects. Thus he presses the ◊-key, the selection mark is now in the highest, invisible position in the list of buried subjects. The signals of the buried subjects who are already in the list of buried subjects are now purposely ignored. The device is now searching for buried subjects who are not yet in the list of buried subjects and leads the rescuer to those as soon as they are recognized.

6.3.4 Limitations


The larger the number of buried subjects, the more difficult and time-consuming the exact analysis of the situation gets, because of overlapping signals. The more signals there are, the longer the signal overlaps can last. The capability to automatically detect and isolate signals from multiple buried subjects is therefore limited.

Number of Burials

The calculated number of burials is displayed below the list of buried subjects. If the transceiver detects more signals than buried subjects in the list, a + sign is added behind the number.

+Symbol

The +symbol indicates that signals are received from additional buried subjects that cannot be isolated and entered in the list of buried subjects yet. Turn off the transceivers of the buried subjects already found as soon as possible to simplify the isolation of the remaining signals.



Search Suspension / "Stand still!"

During the search for multiple subjects, signals may overlap making it impossible to analyze the signal of a single buried subject. If the signal overlap lasts several seconds, the rescuer has to interrupt the process temporarily to avoid deviating from the optimal search path. The Barryvox® will indicate the necessity to suspend (max. 15 seconds) the search by displaying the word «Stop». Stand still, and do not move until the word «Stop» disappears, at which time you can continue to search.

Analog Tone

Outside of the fine search range, the Barryvox always provides the analog tone allowing the rescuer to verify the number of signals detected by the device. Counting the number of different tones provides the number of buried subjects.

Criteria to switch to Analog Mode

If the rescuer detects problems with the analysis of a multiple burial situation, he or she can always switch to the analog mode (see chapter «Analog Mode»). The list of buried subjects is deleted at this time.

If you recognize a discrepancy between your "mental map" of the avalanche and the indications on the transceiver or the + symbol appears for an extended period of time, this is an unquestionable indication that not all buried subjects can be located using the standard mode. In this case, it is advised to switch to the analog mode.

6.4 Analog Mode

In the analog mode, the transceiver shows distance and direction to the subject with the strongest signal and provides an analog tone. **The analog mode is mostly used when a clear distinction of multiple burials is no longer possible in standard mode.**

Switching from standard mode to analog mode is achieved by pressing and holding both keys at the same time for three seconds.


In analog mode, the direction indication always points forward, never backwards. Monitor the distance indication to ensure you are approaching the buried subject!

6.4.1 Multiple Buried Subjects in Analog Mode


If multiple burials are detected in analog mode, an icon symbolizing multiple burials is shown on the display. Additionally, you can also hear the analog tones. These are helpful in distinguishing the signals acoustically. The device favors the closest subject. The detection of multiple burials may vary based on the subject's orientation and distance relative to the rescuer.

Turn off the transceivers of the excavated subjects to facilitate the further search. If you don't know the number of buried subjects, you must search the entire avalanche path using the search patterns described in the chapter «Signal Search».

6.4.2 Search Tactics with Multiple, Widely Scattered Burials

1. Mark the location on the avalanche where the «multiple burial» icon  appeared on the display or where you left the signal search pattern.
2. Search for the first buried subject using the information on the display along with the analog tones. Once this subject is located, you or other rescuers should dig him or her out immediately.
3. Continue to search for other buried subjects by returning to the previously marked point.
4. Strictly adhere to the signal search pattern and continue down the avalanche path until you are led to the next subject. Initially, the transceiver will want to take you to the previously located subject, because he or she is still the closest. Ignore these indicators until you notice that the transceiver is pursuing a new subject.

Search tactics with multiple, widely scattered burials in analog mode

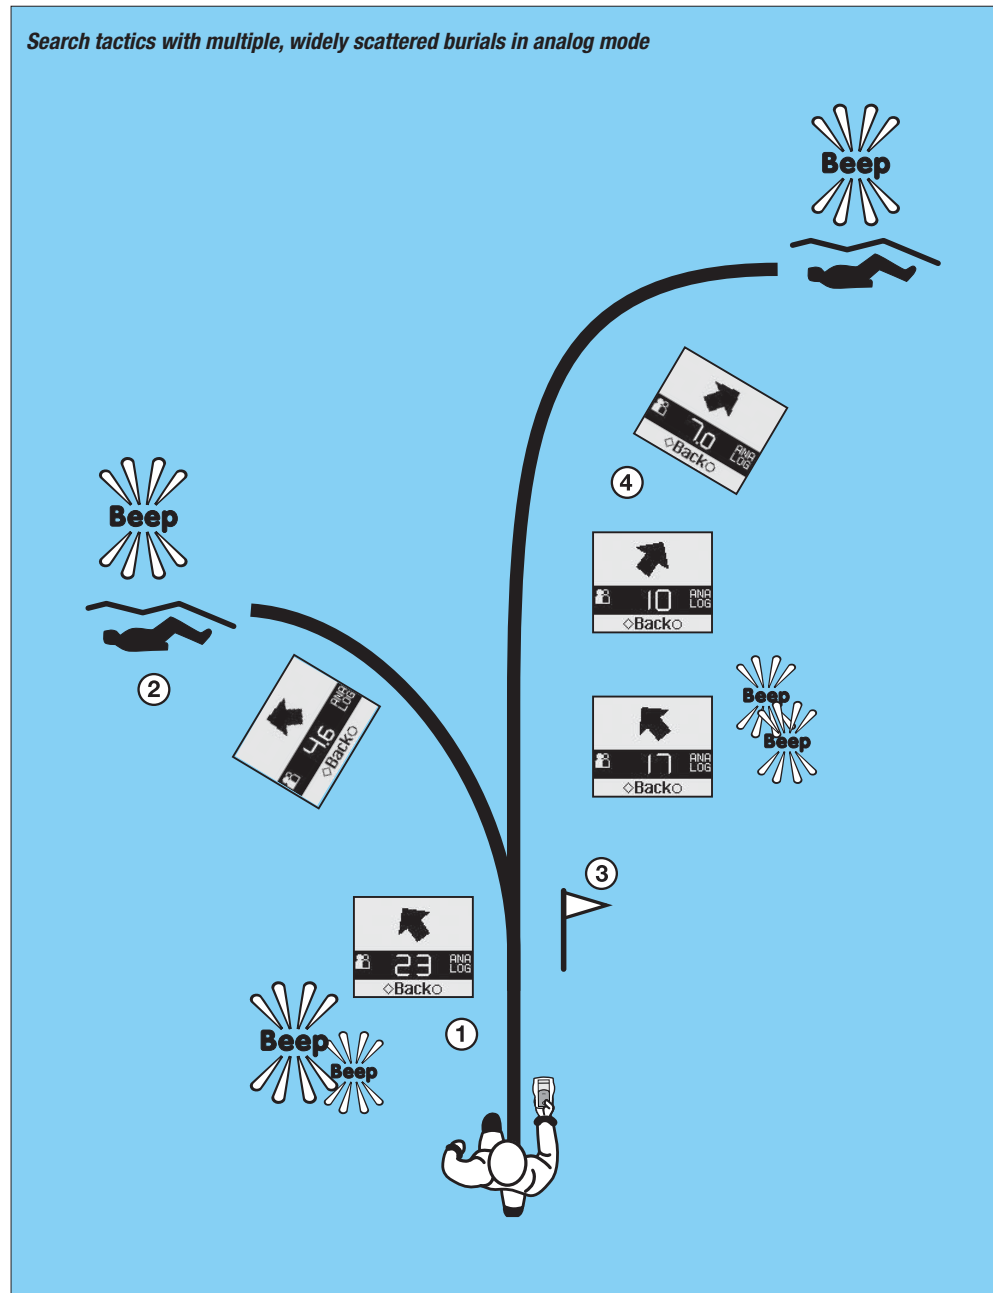

SEARCH MODE

6.4.3 Search Tactics with Multiple Burials in Close Proximity

The interpretation of the acoustic signals is extremely important in this situation. These must be interpreted in connection with the distance readings.

Example:

You hear three beeps and the distance reading jumps between 3.5 and 4.8 m. Therefore, three buried subjects can be expected within a radius of 5 m.

Search Using Micro Search Strips

If you have **multiple burials within less than 10 meters**, you search using **micro search strips**.

1. Locate and dig out the first buried subject.
2. Back up until the display shows 10 and search the area in front of you in **parallel search strips**.
3. As soon as the distance indication reads 10, you have reached the side of the search strip. Advance 2 to 5 meters and return on the next parallel search strip until this search strip ends as well (distance indication > 10).
4. Maintain the orientation of the transceiver during this phase and concentrate on the increase or decrease of the distance indication as well as the volume of the analog tones.
5. At the point with the lowest distance reading, you leave the micro search strip pattern to fine search the buried subject through bracketing. Once the subject is located, you return to the location where you left off in order to continue the pattern.


6. The more buried subjects there are and the closer these are, the tighter the micro search strip grid on the potential search area should be. As a rule of thumb, the search strip width should be between 2 and 5 meters.

7. Continue the pattern, until the distance reading in an entire strip never drops below 10. Then revert to the signal search pattern and search the rest of the avalanche.


The avalanche probe is very helpful in locating multiple buried subjects in close proximity.

6.4.4 Further Search Methods

There are further methods to search for multiple buried subjects in close proximity. The 3-circle method uses concentric, circular search strips with radiuses of three, six, and nine meters around the first located subject. As with the micro search strips, the locations with the strongest signal strength are of interest. From there the subjects are located using a traditional bracketing method.

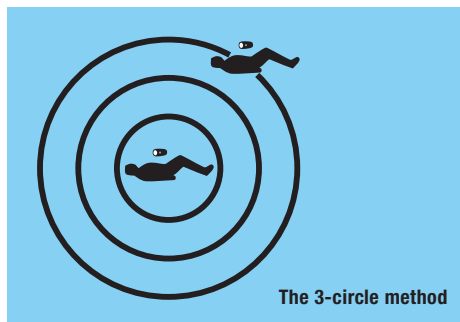

Search tactics with multiple burials in close proximity in analog mode

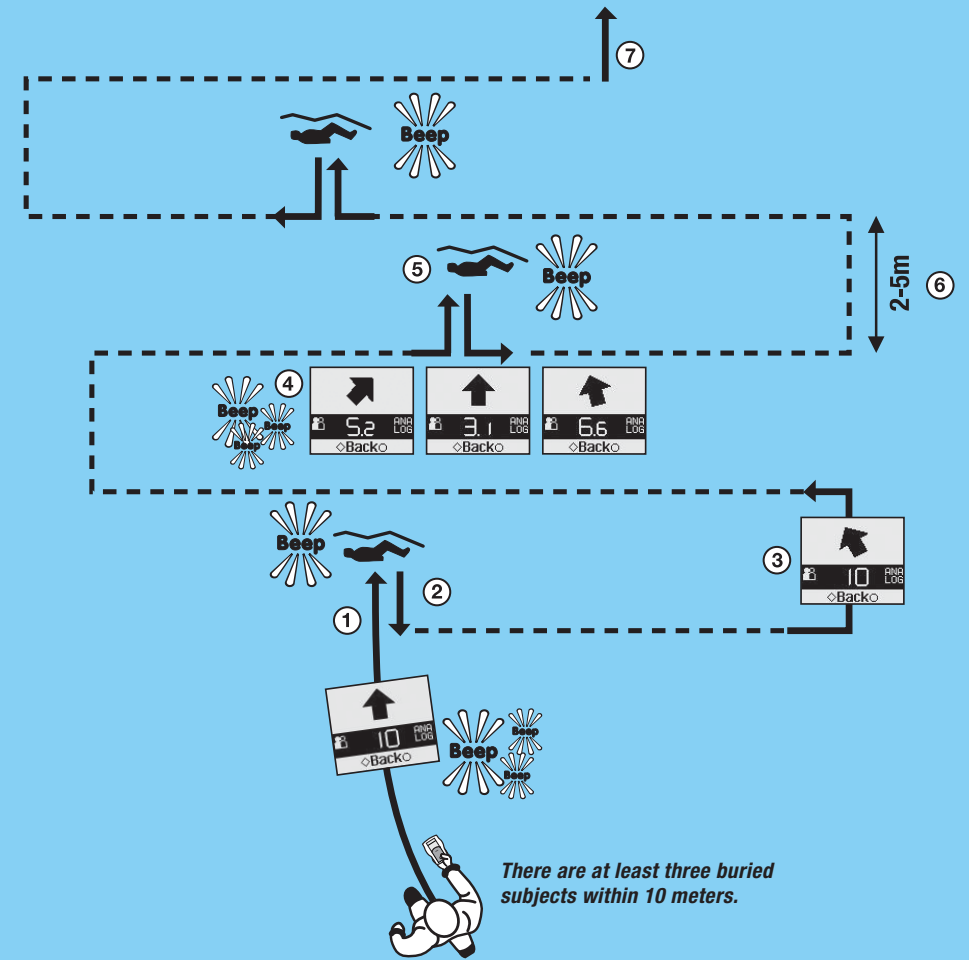

7. Advanced Features

7.1 Manual Volume Control in Analog Mode (Analog Mode = Manual)

In the analog mode (with activated manual volume control), the receiver sensitivity (volume) can be set manually. This makes acoustic searches possible, as conducted with traditional transceivers. This mode is i.e. used when applying „finsearch in a circle“, in surroundings with strong interference such as high voltage power lines or in very complex burrial situations.

Buried subjects are located based on the acoustic change in intensity of the received signal. The use of this mode requires intensive training.

In order to be able to use the manual volume control in analog mode, you must enable it in the «Settings» by choosing «Manual» in the setting «Analog mode». **When using the manual volume control in analog mode, the display can be disabled, in order to significantly increase the range. By pressing the ○ -key for + on volume level 8, the display is deactivated; subsequently pressing the ◇ -key for – activates the display again.** See chapter «Extended Search Strip Width in Analog Mode»

By activating the manual volume control in analog mode, an analog tone is used for the group check, as well.

Once your Barryvox is configured accordingly, you can toggle between standard and analog mode with manual volume control by briefly pressing and holding both keys at the same time for three seconds. The sensitivity of the receiver is initially controlled automatically.

The user can manually change the sensitivity by pressing the ○ -key for + and the ◇ -key for –. A1 represents the shortest, A8 the greatest distance to the buried subject.

Check as well the visualization of these procedures in the «Cockpit Search in Advanced Profile».

As soon as the volume is set manually, a border is displayed around the volume bar. The automatic volume control is disabled. If the volume is set too high or too low, the distance and direction indications become unreliable, and a blinking display prompts the user to adjust the volume.

To return to the standard mode, both keys must be pressed simultaneously.



Display in analog mode
(on the second lowest
volume setting)


Orthogonal Search System (Coarse and Fine Search)

Orthogonal search system with manual selection of the receiver sensitivity:

1. **Maximum tone**
Search for the loudest tone on a straight line.
2. **Reduce volume**
Reduce volume until the tone is barely audible.
3. **Turn 90°**
Search at a 90° angle to the previous direction.

Remember

- Hold the transceiver vertically.
- Search quickly.
The volume only changes if you are moving.
- Search quietly.
This way you can detect differences in volume easier.

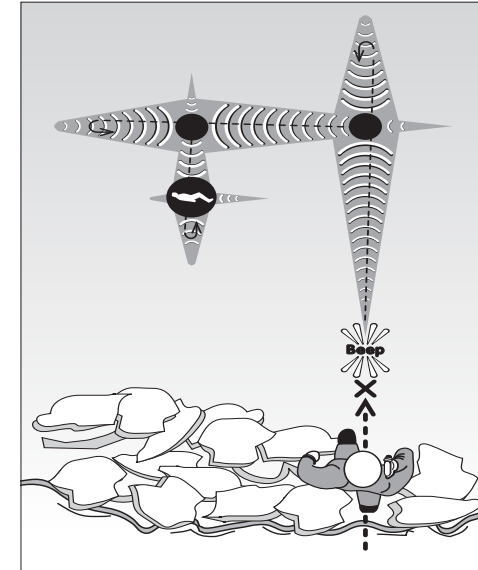

8. Additional Information

8.1 Tone-only Mode (TOM)

If the display is defect, you have to search using the tone-only mode. Turn the transceiver off. Press both keys while turning the transceiver back on. The sensitivity of the receiver can be manually adjusted by using the \circ -key= + and \diamond -key = -. The analog tone is used to locate buried subjects.

8.2 Earphones

The use of earphones in avalanche rescue is especially advantageous in high-noise environments (wind, helicopters, etc.). Standard (MP3-Player) earphones can be used. As soon as earphones are plugged in, the internal speaker is muted so that other rescuers are not disturbed.



8.3 Use in the Dark

If you use the transceiver in the dark, the display is automatically backlit.

8.4 Test and Configuration Adapter

There are various test and configuration adapters available for the PULSE Barryvox®, which allow advanced functions to be configured or restricted. Test, configuration, and update capabilities via the W-Link make the PULSE Barryvox® the ideal choice for fleet use.

8.5 Maintenance and Repair

Barryvox transceivers, which do not function correctly, despite full and properly inserted batteries (e.g. problem listed under troubleshooting, no signal during the group check, mechanical defects) must be sent to a service center listed at the beginning of this manual.

8.6 Maintenance

In the maintenance tab in the start menu, the date of the next check as well as the software (SW) and hardware (HW) version can be displayed.

8.7 Frequent, self-responsible check

Always check the result of the self- and battery test (chapter “Turning the Device On” and “Battery Level Indicator”) and pay attention to alert messages (chapter “Troubleshooting”). Regularly carry out the group checks as indicated in chapter “Group Check”. Furthermore, we recommend that you take self-responsibility by frequently checking your device for mechanical damage of the casing, proper function of the main switch, battery compartment cover as well as cleanness of the battery contacts. In case you detect problems, it is mandatory to have the device checked by one of the service centers listed under “Registration and Service”




8.8 Periodic check by a Barryvox Service Point

To check the proper function of the device, is highly recommended to send the device every 3 years, or when reaching 3000 hours of operation, to a Barryvox service center or have it checked by a Barryvox service point (service charge will apply). The functional test is much more comprehensive and precise than the self and group check. As part of this service the electronics and the mechanical components such as the case, the main switch and the lateral key, the battery contacts, the battery compartment and cover as well as the wrist strap will be checked. In case the check shows abnormal wear and tear due to incorrect or long, very intense use, the service center may recommend you to purchase an exchange device.

We recommend that you have your device checked during the summer months so that your Barryvox is tested and ready to use at the start of the next winter season. In the “Maintenance” tab in the start menu, you can see when the next check is due.

ADDITIONAL INFORMATION

8.9 Troubleshooting

Alert message / failure description	Solution
Transceiver doesn't turn on / No self-test at startup	<ol style="list-style-type: none"> 1. Check and replace batteries. 2. If this doesn't help, the device must be repaired.
Batteries are empty! 	The batteries must be replaced as soon as possible. Refer to the instruction in the chapters «Insert / Replace Batteries» and «Battery Level Indicator».
Batteries are weak! 	The inserted batteries are not new and their remaining battery capacity is unknown. The device does not support the use of these batteries as it cannot reliably determine their remaining battery capacity. Insert 3 new lithium or alkaline batteries.
Battery capacity unknown! 	The inserted batteries are not new and their remaining battery capacity is unknown. The device does not support the use of these batteries as it cannot reliably determine their remaining battery capacity. Insert 3 new lithium or alkaline batteries.
Alert 457 SEND! SEND LED doesn't blink	<ol style="list-style-type: none"> 1. Make sure that no metal objects or electronic devices are close to the transmitter. 2. Check and replace batteries. 3. Turn the transceiver off and turn it back on after it has properly shut down. 4. If this doesn't help, the device must be repaired.



Alert message / failure description	Solution
Alert 457 SEARCH!	<ol style="list-style-type: none"> 1. Make sure that no metal objects or electronic devices are close to the transmitter. 2. Turn the transceiver off and turn it back on after it has properly shut down. 3. If this doesn't help, the device must be repaired.
Alert g-sensor!	<ol style="list-style-type: none"> 1. Turn the transceiver off and turn it back on after it has properly shut down. 2. If this doesn't help, the device must be repaired.
Alert compass!	<ol style="list-style-type: none"> 1. Make sure that no metal objects or electronic devices are close to the transmitter. 2. Turn the transceiver off and turn it back on after it has properly shut down. 3. You will be prompted to calibrate the device. Please follow the instructions in chapter "Calibrate device" 4. If this doesn't help, the device must be repaired.



8.10 Warranty

There is a 5-year warranty on the Barryvox transceiver (excluding the batteries, the carrying system, and the wrist loop) from the date of purchase shown on the purchase receipt. In case of a warranty claim, all parts that can be shown to have material or production defects will be replaced free of charge. Damage that can be traced to incorrect handling or normal wear and tear is excluded. The warranty is voided if the buyer or any non-authorized third party opens the device. This is also the case for devices that have been used with spare parts or accessories, which are not original and are not recommended by the manufacturer. A fee will be charged for the diagnostic test of a transceiver not needing any repair. Warranty repairs do not extend the duration of the warranty. There is a six-month warranty on spare parts. Warranty repairs will only be conducted if the device is sent in along with the receipt. The owner will be charged for the shipping. No other warranty shall exist. Any liability for any kind of loss or damage including but not limited to any direct, indirect or consequential damage is explicitly excluded.

8.11 Technical Data

Transmitter frequency	457 kHz (International standard)
W-Link frequency	Region A: 869.8 MHz Region B: 916 – 926 MHz Frequency setting see chapter «W-Link»
Power supply	3 x IEC – LR03 1.5 V Alkaline (AAA) or 3 x IEC – LR92 1.5 V Lithium (AAA)
Initial set of batteries	Duracell Ultra Alkaline
Battery life	min. 200 h
Maximum range	Normally 60 m in standard mode, 90 m in analog mode
Search strip width	50 m in Standard Search Mode 80 m in Analog Mode, see chapter «Extended Search Strip Width in Analog Mode» The search strip width has been calculated based on the method Good
Operating temperature range	-20° to +45° C
Dimensions (L x W x H)	113 x 75 x 27 mm
Weight	210 g (incl. batteries)
Earphone jack	for standard Hi-Fi earphones
Type/Model PULSE Barryvox®	462001-10000 (W-Link 868 MHz) 462002-10000 (W-Link 915 MHz) 462003-10000 (W-Link off)

8.12 Approval / Conformity

All information concerning approval and conformity is available in the Barryvox Legal and Regulatory Guide.

All information provided without liability. Status July 2013. Technical data and specifications are subject to change without notice in future transceivers.

9. Companion Rescue

Companion rescue means that buried subjects are located and excavated by members of their party immediately after the avalanche slide. Avalanche rescue is a race against time! While most buried subjects can be rescued within the first 8 minutes, the chances of survival decrease rapidly afterwards. Companion rescue, therefore, provides the greatest chances of survival for a buried subject.

9.1 If an Avalanche Occurs

As a Victim:

- Escape to the side
- Discard skis, snowboards, and poles
→ anchor effect
- Try to stay on top
- Close your mouth; place your hands in front of your face
→ clear airway when the avalanche stops

Separate instructions apply for the use of specialized safety equipment, such as the highly efficient flotation devices.

As a Witness:


- Memorize the last seen point as well as the direction of the avalanche
→ signal search strip
(See chapter «Signal Search»).

9.2 Personal Rescue Equipment

Carrying the proper personal safety equipment is critical for effective companion rescue. A transceiver, a shovel, and a probe pole are necessary to localize and excavate a buried subject quickly and efficiently.

Mammut offers a variety of suitable probe poles and shovels.

The use of a flotation device (airbag system) significantly reduces the risk to be completely buried and therefore leads to considerably higher survival chances.



The use of the transceiver precedes the use of the probe pole and the use of the probe pole precedes the use of the shovel.

Carrying a radio or a mobile phone to call for help is highly recommended.

9.3 Emergency Plan

The emergency plan shows the elementary steps for a successful companion rescue. Depending on the situation at hand, the procedure must be adapted.



9.4 Triage Criteria and Vital Data

9.4.1 Triage

With limited resources (few rescuers) it is not possible to locate and dig out all the buried subjects at the same time. The question arises in which order the buried subjects shall be rescued. **Subjects with higher chances of survival should be located and dug out first.** Besides simple terrain factors, e.g. drop over a cliff, in seracs or crevasses, collision with trees etc., the burial depth and vital data are important triage criteria.



9.4.2 Vital Data Detection

The PULSE Barryvox® contains highly sensitive sensors (g-sensor) that can detect slight motion of the body, such as a pumping heart or breathing lungs. Any motion within a certain maximum lag time is interpreted as vital data. The buried subject belongs to the category ♥ with high chances of survival. It can be assumed that buried subjects, which have survived the first 35 min, are still able to breathe (air pocket), and therefore have increased chances of survival. At the same time, the detectability of vital data decreases due to hypothermia. Therefore, buried subjects who have transmitted vital data for the first 35 min are considered to belong to the category ♥ with high chances of survival for the rest of their burial duration.

All the buried subjects, whose transceivers are technically not capable of detecting vital data or cannot detect any for whatever reason, belong to the category 🧑 with unknown chances of survival.

If you carry the transceiver in a trouser's pocket, the detection of vital data is not possible due to the almost non-existent movements.

The data are displayed on the buried subject's transceiver and also sent across the W-Link radio connection to the transceivers of the rescuers. Based on the list of buried subjects, the rescuer decides in which order he or she will locate and dig them out. Using vital data as a triage criteria shortens the burial duration for those subjects having ♥ higher chances of survival. This improves the overall rescue efficiency.

The vital data do not provide an assessment of the health of the buried subject. They do not substitute an assessment by medically trained personnel (physician).

Only rescuers using a transceiver with a W-Link radio connection are able to receive vital data.

The range of the W-Link depends on terrain and body interference, on the physical characteristics of the avalanche debris as well as on the orientation and distance to the buried subject. **The range of the W-Link is therefore limited.**

9.4.3 Burial and Vital Duration

In case of a burial, the transceiver records the burial duration and detects vital data.

The Barryvox automatically displays the burial duration as soon as the transceiver stops being moved. The burial duration is displayed in hours and minutes along with the time during which vital data was detected. The display of the burial duration is also activated, if the Barryvox stops moving outside of an avalanche.



Burial duration: 25 min
Vital data:
entire burial duration




Burial duration: 47 min
Vital data: first 22 min

By pressing any key in the SEND mode, you can recall the burial data of the five last resting periods of the transceiver. The resting periods are numbered:

- 1 most recent resting period
- 2 second last resting period
- 3 third last resting period
- 4 fourth last resting period
- 5 oldest resting phase

The current resting phase is not numbered.

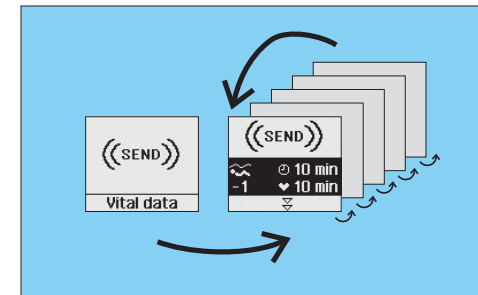


In multiple burial situations, the transceiver of a rescued subject should be turned off as soon as possible.

9.5 Pinpointing with Transceiver and Probe Pole

Pinpointing the location of a buried subject is not possible with a transceiver alone. The burial depth and the orientation of the subject can be determined easily and quickly with a probe pole. Use the shovel to mark the point with the lowest distance reading or loudest tone as a visual reference for the probing spiral. Always probe at a right angle to the snow surface.


If the buried subject is hit with the probe pole, the pole is left in the snow. It serves as a guide while excavating the buried subject.

The burial depth is also a triage criterion. In situations with limited resources deep burials are located later.

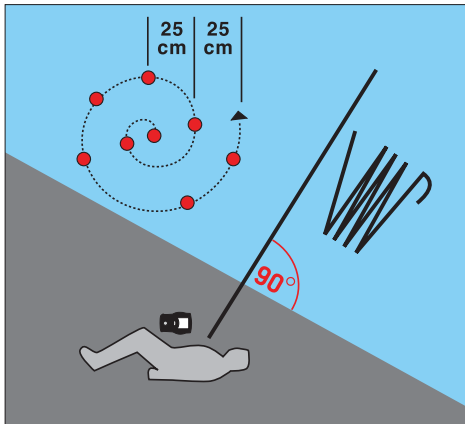

9.5.1 Multiple Rescuers in the Fine- and Pinpoint Search

If several rescuers are present while you are in the fine or pinpoint search phase, place a probe 1 meter below the expected burial location. Now, you have the required space to conclude the fine and pinpoint search while the remaining rescuers already start with the excavation of the buried subject. When you have confirmed the find with a probe hit, remove the pilot probe so that the V-shaped snow conveyor belt can be extended.

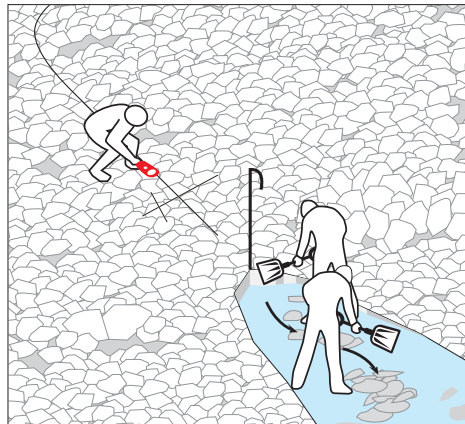

9.5.2 No Probe Hit

If the buried subject cannot be found by the probe, place the probe approx. 1 meter above the point with the lowest distance indication. While digging, enough space is now made available to allow a further fine and pinpoint search within the excavation site.




For further information concerning the search and excavation of deep burials, please consult in publications on "Fine Search in a Circle".

9.6 Rescue – Excavating the Buried Subject

Size the area to be dug out generously. Pay attention to the presence of an air pocket and avoid trampling on top of the buried subject. Access the buried subject laterally. Digging must be practiced as well. It takes by far the most time.

The V-Shaped Snow Conveyor Belt

- Position diggers in a «V» formation
- The first two rescuers are in a distance of one shovel length from each other, all additional rescuers are in a distance of two shovel length from each other.
- Length of «V»:
 - Flat terrain: 2x burial depth
 - Steep terrain: 1x burial depth
- Amount of rescuers: 1 per 80 cm length of «V»
- Rescuer in the tip of the «V» directly digs following the probe to the buried subject
- Diggers rotate frequently (approx. every 4 min) clockwise on command of the rescue at the tip of the «V»
- Cut out blocks of snow with the shovel by stepping on the shovel blade which is held perpendicular to the surface. Apply a half-moon shaped cutting pattern. Position yourself facing the open end of the «V», cut the first half-moon without pulling back on the shovel shaft. When cutting the second and subsequent half-moons, pull the shovel shaft gently backwards after you have cut the block so that it pops out. To cut the next half-moon, step backwards toward the probe, like this, you do not step on the pre-cut blocks.

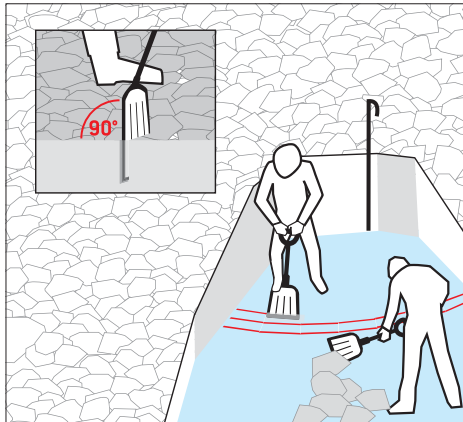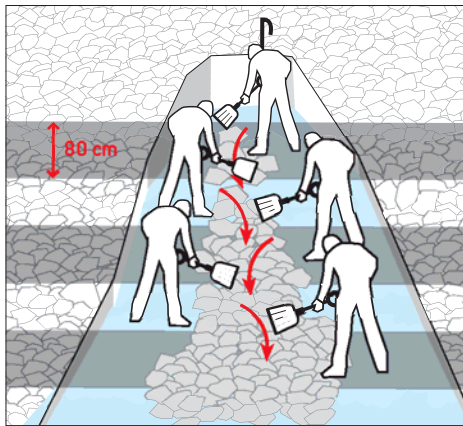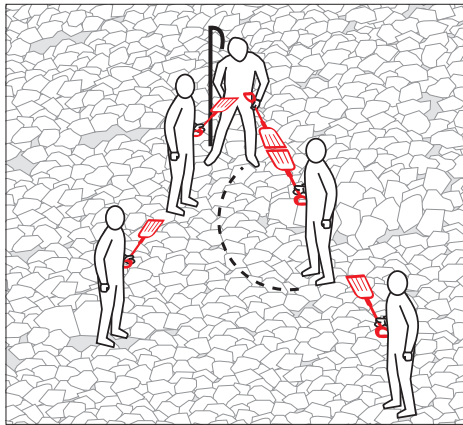

9.7 First Aid

Patient assessment, ABCs, and Basic Life Support

- A** Airway?
Clear the airway (snow?)
- B** Breathing?
Perform rescue breathing as necessary
- C** Circulation
Perform CPR as necessary

Basic Life Support

- Depending on ABCs, continue rescue breaths or CPR on patient.
- **For a patient in an avalanche accident, special attention need to be paid to the immediate clearance of the airway and rescue breaths.**
- Prevent further heat loss.
- If patient is responsive and can control his/her airway, administer warm fluids
- Handle patient very gently.
- Evacuate by helicopter whenever possible.

9.8 Notification

It is not possible to provide a complete list of all mountain and helicopter rescue services in this manual.

Please inform yourself prior to your trip about the local rescue services and their phone numbers and radio frequencies.

Message:

- Who** – is calling?
- What** – happened?
- Where** – is the accident site?
- When** – did it happen?
- How many** – casualties (nature of injuries) / how many rescuers?
- Weather** – at the accident site?

Alpine Distress Signal

If you cannot call for help using a radio or phone, you should try to communicate the emergency using the alpine distress signal.

We need help 6x/minute
Help is on the way 3x/minute

In visual contact with a helicopter:



Help!



No help needed!

10. Introduction to Avalanche Theory

We would like to provide you with some basics on this complex topic and recommend thorough initial and ongoing advanced avalanche training.

The Slab Avalanche: The Set Trap

Most winter outdoor travelers trigger their own avalanches. The snowpack is fragile. Slab avalanches resemble set traps: If we trigger it, the trap snaps. Remember that a small slab of 100m³ weighs about 25 tons!

10.1 Hazard identification

Very critical weather situations

The avalanche danger increases rapidly after storms with new snow, wind, and cold temperatures. Slopes with wind-drifted snow are especially dangerous! Snow can also be moved by wind during nice weather. The first nice day after a snow event is particularly dangerous. Most accidents occur when a cold front with strong winds and snow moves in after days of blue skies and cold temperatures! In this situation, new snow amounts of 10 – 20 cm can constitute a critical situation that can last several days.

Rapid and strong warming (downslope wind, rain) can also cause an increase in avalanche danger, which decreases again with falling temperatures. If the snowpack is uneven and weak, the danger is hard to perceive. This is often the case with shallow snow packs in the beginning of winter or during periods of little precipitation. In spring, the danger usually increases as the day progresses: from low in the morning following a clear night to considerable in the afternoon.

10.2 Risk Assessment

Critical amounts of new snow

With the following amounts of new snowfall within 1 – 3 days, the danger level is at least CONSIDERABLE:

10–20 cm	with adverse conditions
20–30 cm	with average conditions
30–50 cm	with favorable conditions

Adverse conditions

- Strong wind (> 50 km/h)
- Low temperatures (< -8° C)
- Slope seldom traveled

Favorable conditions

- Light wind
- Temperatures little below 0° C
- Slope traveled frequently

Humans as Trigger of the Trap

The steeper and more shaded the slope is, the greater the likelihood of releasing a slab avalanche. The likelihood increases with large groups without spacing, frequent turns, and especially with falls or jumps over cornices or other shock loading. Remote triggering is possible starting with the danger level CONSIDERABLE, i.e. the person triggering the avalanche can be standing dozens of meters outside of the fracture zone. This is fatal at the bottom of a slope, because the entire slope above can be released!

Note: Light forest (trees far enough apart to ski or ride through) will not protect you from slab avalanches. Even rock outcroppings will not prevent the release of slab avalanches.

10.3 Precautions

10.3.1 Standard Safety Precautions

The following standard safety precautions should always be taken regardless of the danger level:

- Avalanche transceiver on SEND, along with a probe pole and shovel
- Avoid fresh wind-deposited snow
- Consider daily fluctuations in temperature, especially in the spring
- Constantly assess the conditions throughout the trip

Pay attention to **avalanche hazard even during the summer**, in particular after recent snowfall. Apply the safety precautions if required.


INTRODUCTION TO AVALANCHE THEORY

10.3.2 Minimize Stress on the Snowpack

Adequate spacing is an effective method to minimize stress on the snowpack. Ascending, the spacing should be approximately 10 meters; descending approximately 30 – 50 meters, due to the additional stress. Danger zones should be traveled one person at a time. Minimize the stress on the snowpack by making long turns. Avoid jumping!

10.3.3 Renunciation in the Terrain

(Basic Reduction Method, W. Munter)

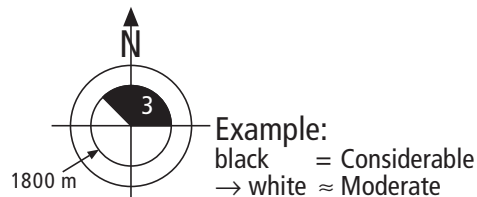

Danger Level	Skiable/ridable slope angle
2-Moderate	less than 40 degrees
3-Considerable	less than 35 degrees
4-High	less than 30 degrees

- Untracked steep slopes (> 30 degrees):
→ spacing of at least 10 m.
- Outside of the forecasted aspect or altitude ranges:
→ the danger level is generally one level lower.
- At the edge of the forecasted aspect or altitude ranges:
→ Do not approach the limits

10.4 Avalanche Forecast Centers

It is impossible to publish a list of all the avalanche forecast centers in this user manual.

Current information about all avalanche forecast centers can be found ie. At www.avalanche.org (worldwide) and www.avalanches.org (Europe).

10.5 International Avalanche Danger Scale

Danger Level	Snowpack	Typical Indications	Tours
1 LOW 	Snowpack generally well bonded.	None.	Generally favorable conditions.
2 MODERATE 	On some steep slopes snowpack only moderately bonded.	Difficult to recognize. No alarm signals.	Generally favorable conditions. Careful choice of route on steep slopes of aspect and altitude as given in the avalanche forecast.
3 CONSIDERABLE 	On many steep slopes medium to poor snowpack bonding only.	«Whumphing» noises. Some spontaneous avalanches. Remote triggering at the foot of slopes.	Partly unfavorable conditions. Experience in assessing avalanche risk required. Wherever possible avoid steep slopes of aspect and altitudes given in the avalanche forecast.
4 HIGH 	Poor bonding of snowpack on most steep slopes.	Spontaneous avalanches. Remote triggering.	Unfavorable conditions. Tours only in moderately steep terrain < 30°. Be aware of avalanche runout zones.
5 EXTREME 	Generally poor bonding of snowpack, mostly unstable.	Spontaneous avalanches and remote triggering on a large scale.	Very unfavorable conditions. Refrain from tours.

A

Address **3.1.5**
 Advanced Profile **2.3.2**
 Adjusting the screen contrast **3.1.4**
 Air pocket **9.1/7.4.2/9.6**
 Alkaline batteries **2.2.1**
 Alpine distress signal **9.8**
 Analog mode . **6.4/6.3.4/7.1/3.4.1**
 Analog tone . . **4.1.1/4.3.2/4.3.3/4.3.4/4.4/5.1/5.2.1/8.1**
 Anchor effect **9.1**
 Approval **8.12**
 Area last seen **4.1.1/9.1**
 Audio support during fine search **3.4.2**
 Auto-revert to SEND . . **6.2/3.4.4**
 Automatic volume control **5.1**
 Avalanche release **9.1**
 Avalanche danger scale **10.5**
 Avalanche forecast . . . **10.4/10.5**
 Avalanche forecast center . . **10.4**
 Avalanche theory **10**

B

Backlit **8.3**
 Basic Life Support **9.7**
 Basic Profile **2.3.2**
 Basic reduction method . . **10.3.3**
 Batteries **2.2/4.5**
 Battery test **2.7/4.5**
 Battery level indicator . . . **4.5/2.7**
 Bracketing **4.3.2/5.1**
 Burial depth . . **4.3.2/9.4/9.5/9.6**
 Burial duration **9/9.4.3**

C

Calibrate device **5.2.9/2.3.3**
 Call for help **9.8**
 Carrying positions **4.3**
 Carrying system **4.3.1/4.3.2**
 Coarse search **6.1/6.3.2**
 Companion rescue **9**
 Configuration adapter **8.4**
 Conformity **8.12**
 Critical new snow **10.2**

D

Danger descriptors **10.5**
 Darkness **8.3**
 Default settings **3.4.10**
 Device malfunction **8.9**
 Diagnostics . . . **4.4/4.6/3.4.7/8.7**
 Direction indication **6.3.2**
 Display **3.1.4/4.4/8.3**
 Distance indication . . **6.3.2/5.2.3**
 Double group check **4.6**

E

Earphone **8.2**
 Ease of use **1.2**
 Emergency plan **9.3**
 EN 300718 **8.11**
 Error messages **8.9/4.4**
 Excavation **9.6**

F

Fine search . . **6.1/6.3.2/3.4.2/9.5**
 Fine search view **6.3.2/9.5**
 First Aid **9.7**
 Flotation devices **9.1**

G

g-sensor **9.4.2/8.9**
 Group check **4.6/3.4.5**

H

Hazard identification **10.1**
 Headlamp **4.2**

I

Interferences **4.2**

J

Keys **1.2**

L

Language **2.3.1**
 Last seen point **4.1.1/9.1**
 Leaking batteries **2.2**
 Lithium batteries **2.2.2**

M

Magnetic buttons **4.2**
 Main switch **1.1**
 Maintenance **8.6/8.7/8.8/8.5/3.1.6/8.4**
 Malfunction **8.9**
 Mark **6.3.2/6.3.3/6.3.4**
 Metal **4.2/8.9**
 Micro search strips **6.4.3**
 Mobile phone **4.2/9.8/9.2**
 Moisture **4.1/2.2/8.11**
 Multiple burials . . **6.3.3/9.4/6.4.1**
 Multiple rescuers **9.5.1/6.3.3**
 Mental map **6.3.3**

N

O

Off **1.1/9.4.3**
 Orthogonal search system . . **7.1**
 Owner **3.5.1**

P

Pacemaker **4.2**
 Periodic checks **8.7**
 Personal identification **3.5.1**
 Pocket **4.3.2**
 Preventative Maintenance . . **8.8**
 Probe pole . . **4.3.2/9.2/9.5/9.5.2**
 Probing spiral **9.5**
 Profile **2.3.2**

Q

R

Radio **4.2/9.2/9.8**
 Rechargeable batteries . . **2.2/2.8**
 Reduction method **10.3.3**
 Reset **3.4.10**
 Rescue **9**
 Rescue equipment **9.2**
 Rescue-send mode **5.1**
 Risk assessment **10.2**

S

Safety precautions **10.3.1**
 SEARCH **1.1/6**
 Search mode **6**
 Self-test **4.4**
 SEND **1.1/5**
 Settings . . . **3/2.3.1/2.3.2/3.1.1**
 Shovel **9.2/9.6**
 Signal search **6.1.1**
 Slab avalanche **10**
 Sound check **6.3.3**
 Start menu **3**
 Standard mode **6.3**
 Storage **4.1/2.2**
 Stop **6.3.4**
 Summer **2.2/8.7/8.8/10.3.1**
 Suspension **6.3.4**
 Switch **1.1**

T

Technical data **8.11**
 Test **4.6/5.2/8.7/2.7**
 Test adapter **8.4**
 Test distance **2.9/4.6**
 Tone-only mode **8.1**
 Triage, triage criteria . . **9.4/9.4.1**
 Troubleshooting **8.9**
 Turn on **1.1/2.7**
 Turn off **1.1/9.4.3/6.4.1**

U

V

Vital data **9.4.2/9.4/9.4.3/6.4.3/3.4.6/2.6**
 Vital data detection . . **9.4.2/3.4.6**
 Vital sensor test . . **3.4.7/4.3/4.3.1**

W

Warranty **8.10**
 W-Link **3.4.8/2.3.3/9.4.2/8.4/8.11**

X

Y

Z